

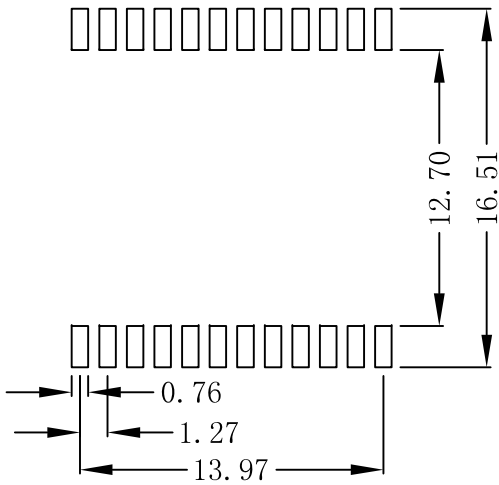
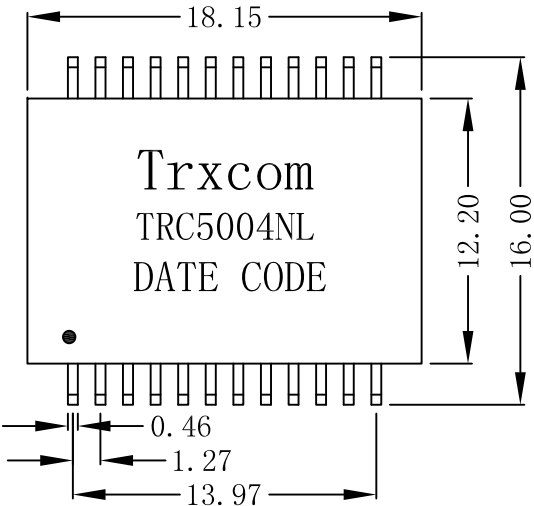


Mechanical:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
B	REL		2015-04-24	

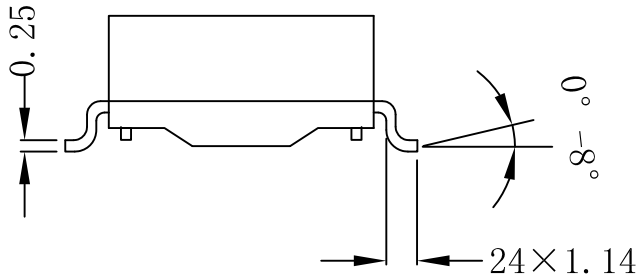

SUGGESTED PAD LAYOUT

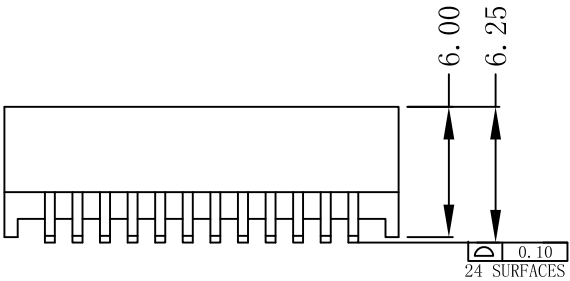

NOTES:

- 1.Designed to support application,such as SOHO(ADSL modems),LAN-on-Motherboard(LOM),hub and Switches.
- 2.Meets IEEE 802.3 specification.
- 3.Maximun reflow temperature is 250℃,5 Sec.
- 4.UL certification: file number E321120



X:X	±0.25	APPD:	Trxcom ShenZhen Trxcom Electronics Co.,Ltd.	
X:XX	±0.20	CHKD:		
X:XXX	±0.10	DR: GRANT	TITLE: 1000Base-T Magnetic Modules	
ANGLES	±1°	UNIT: mm	PART NO.: TRC5004NL	
		SCALE: 2/1	SHEET: 1/2	REV: B
			DWG NO.: TRC14122009	