


SPECIFICATION

Current Rating:3 Amps
Withstanding Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

H D 1 X XX - H H
(1) (2) (3) (4) (5) (6)

- (1) H:2.54mm Pin Header
- (2) D:DIP Straight
- (3) 1:Single Row
- (4) XX:No. Of Position/Per Row
- (5) H:Withstand High Temperature Soldering
- (6) H:RoHS Compliant

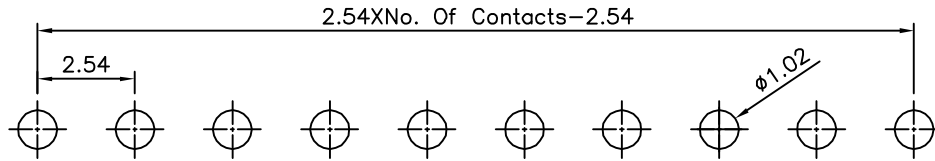

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

