


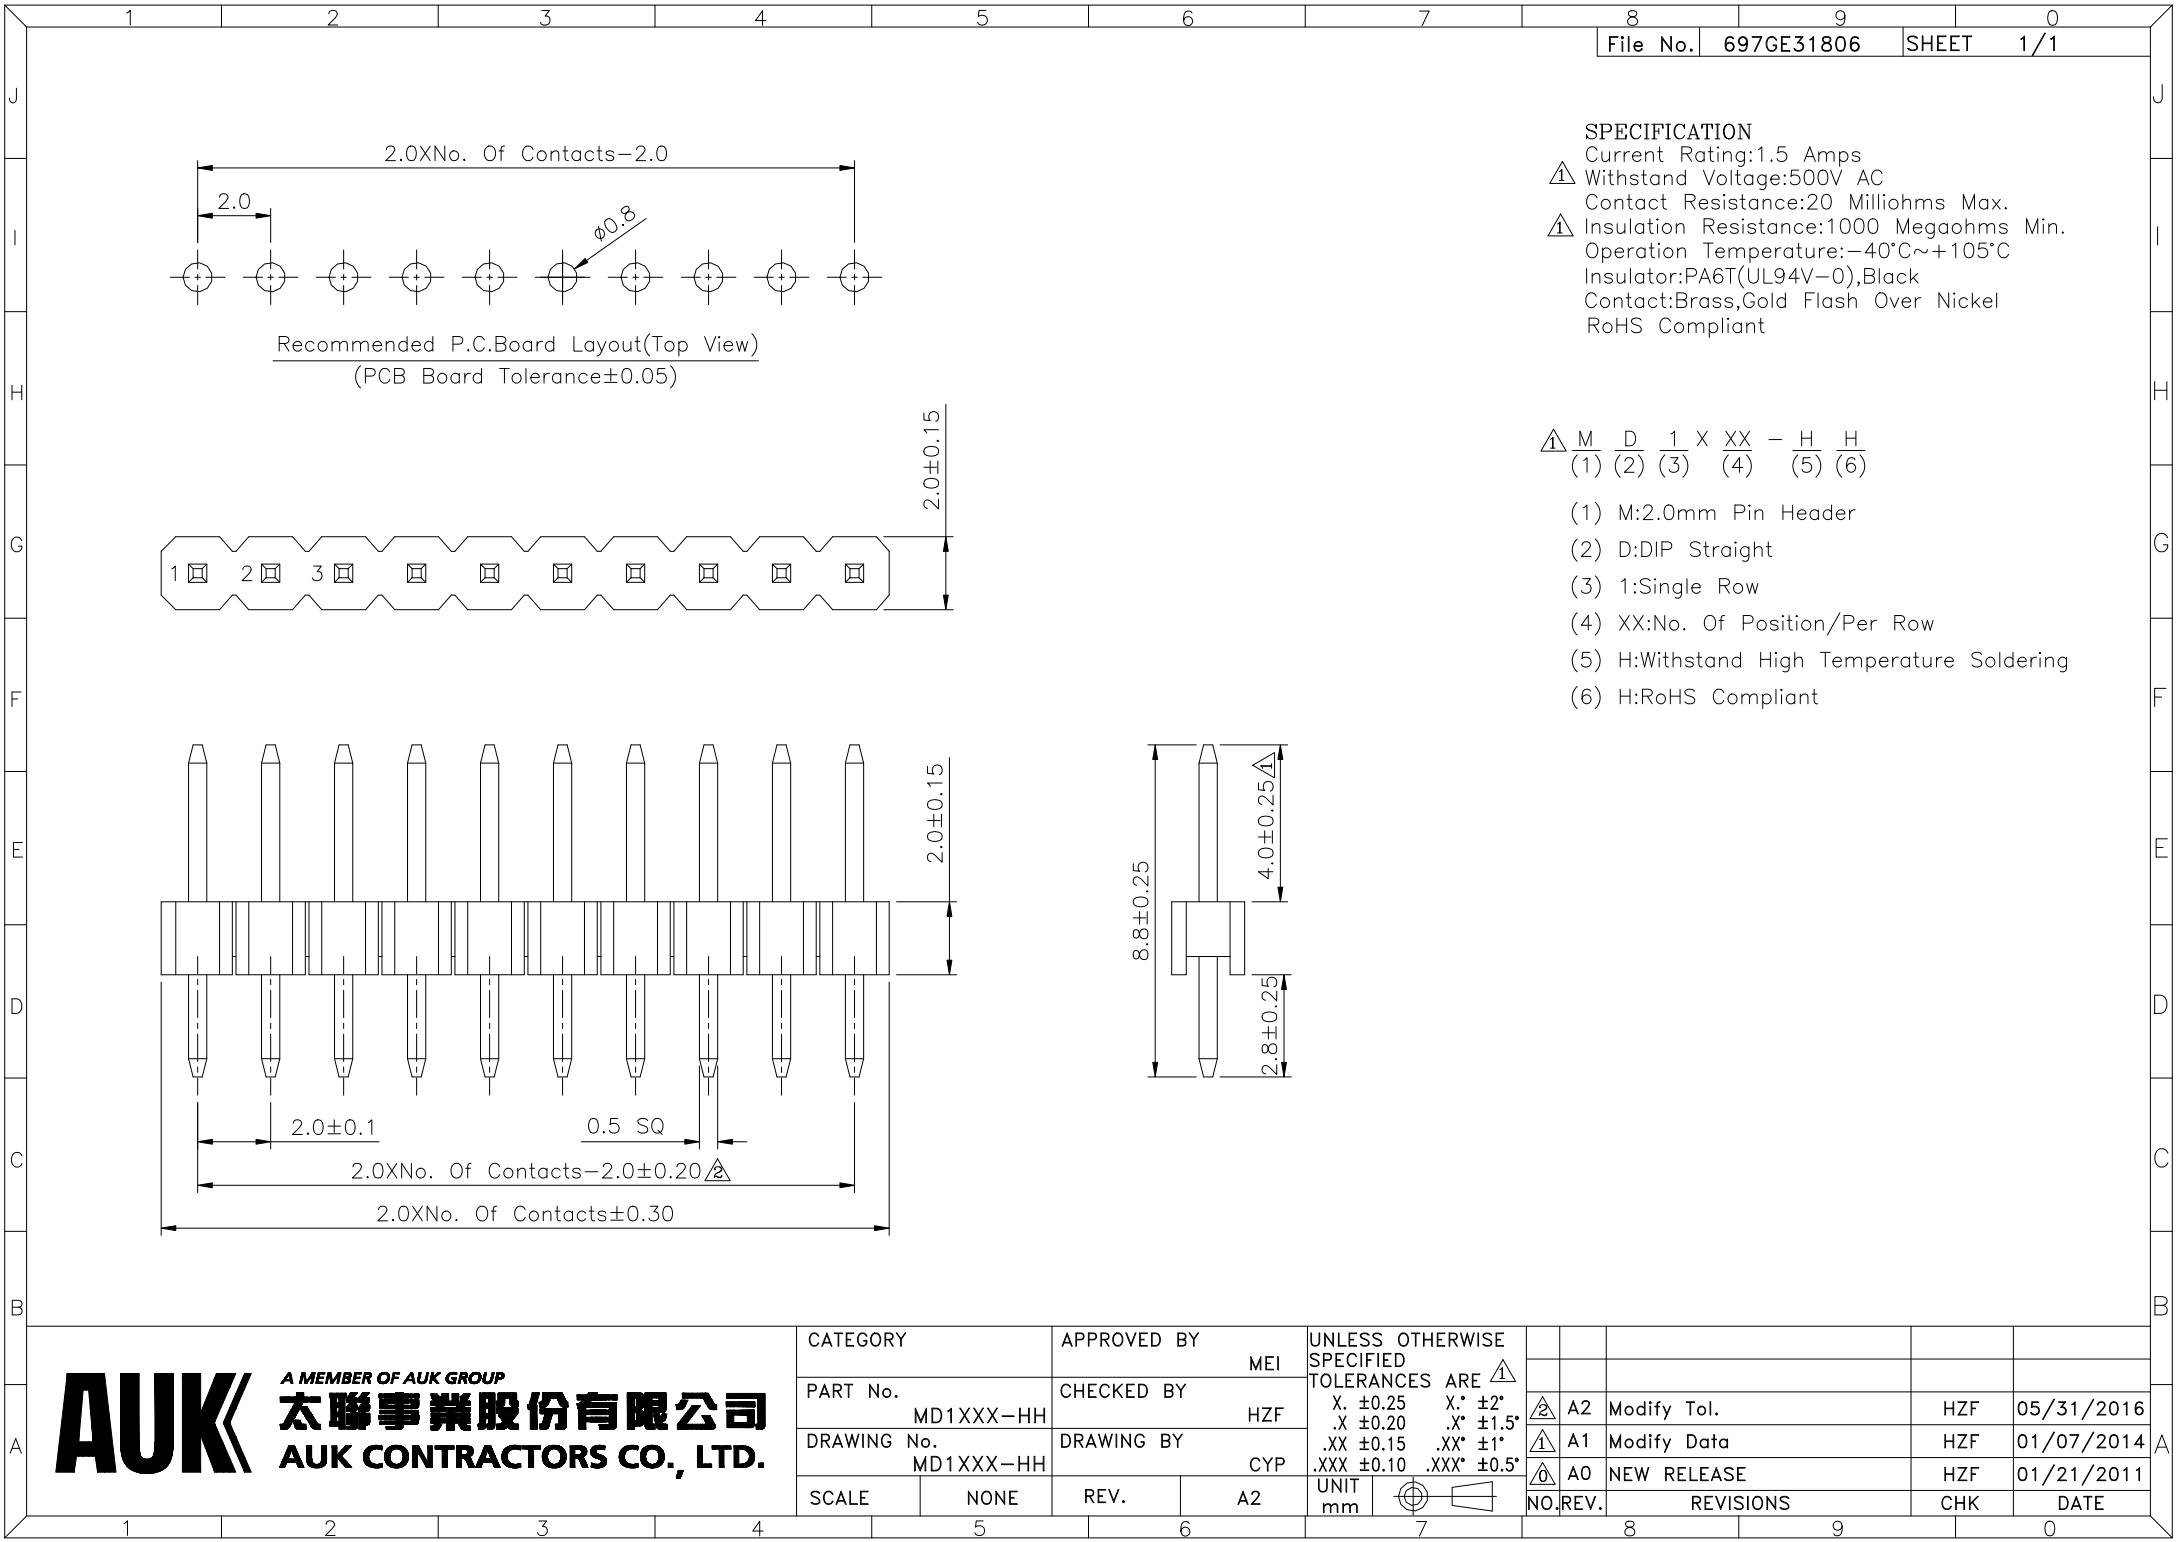

SPECIFICATION
Current Rating:1.5 Amps
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

△ M D 1 X XX - H H
(1) (2) (3) (4) (5) (6)

- (1) M:2.0mm Pin Header
- (2) D:DIP Straight
- (3) 1:Single Row
- (4) XX:No. Of Position/Per Row
- (5) H:Withstand High Temperature Soldering
- (6) H:RoHS Compliant

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE Δ X. ± 0.25 X.* $\pm 2^*$.X ± 0.20 .X* $\pm 1.5^*$.XX ± 0.15 .XX* $\pm 1^*$.XXX ± 0.10 .XXX* $\pm 0.5^*$							
PART No.		CHECKED BY									
DRAWING No.		DRAWING BY									
MD1XXX-HH		HZF				Δ	A2	Modify Tol.		HZF	05/31/2016
DRAWING No.		CYP				Δ	A1	Modify Data		HZF	01/07/2014
MD1XXX-HH						Δ	A0	NEW RELEASE		HZF	01/21/2011
SCALE	NONE	REV.	A2	UNIT		NO.	REV.	REVISIONS		CHK	DATE
				mm							