

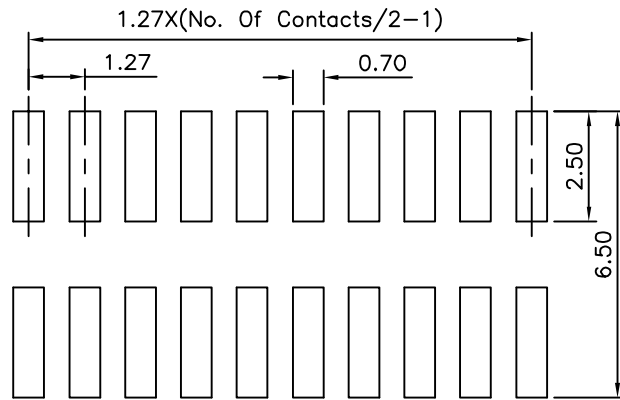



SPECIFICATION

Current Rating:1A
 Dielectric Strength:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~100 Contacts
 RoHS Compliant

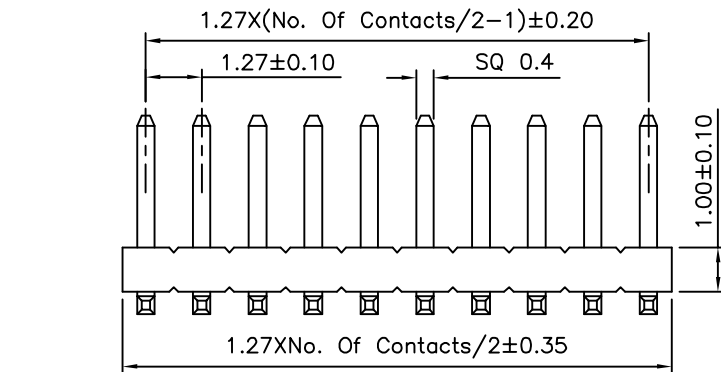

Recommended P.C.B. Layout

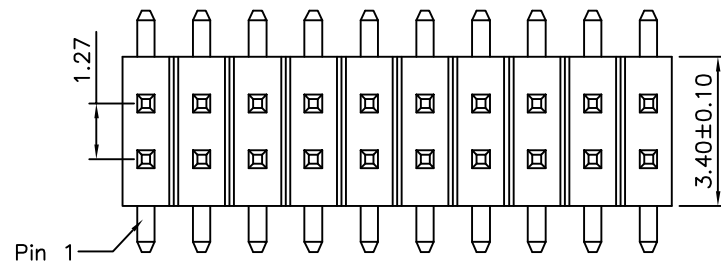

PA V X 15 - 2 X XX - H
 (1) (2) (3) (4) (5) (6) (7)

- (1) PA:1.27X1.27 Pin Header
- (2) V:SMT Straight
- (3) X:Without Post
- (4) 15:SMT Height 1.5mm
- (5) 2:Dual Row
- (6) XX:No. Of Position/Per Row
- (7) H:RoHS Compliant

CATEGORY		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°							
PART No. PAVX15-2XXX-H		CHECKED BY HZF									
DRAWING No. PAVX15-2XXX-H		DRAWING BY GAO									
SCALE		NONE		REV.		CO		UNIT mm			