
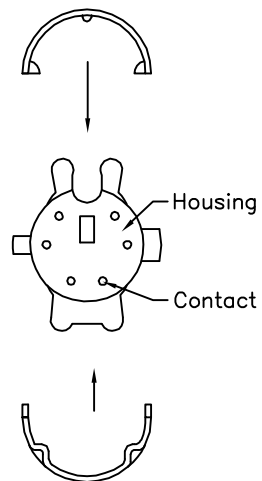
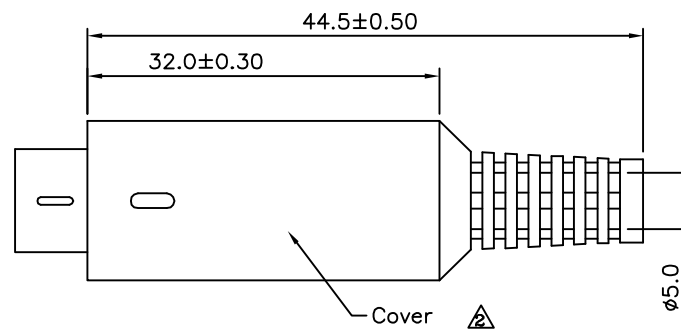
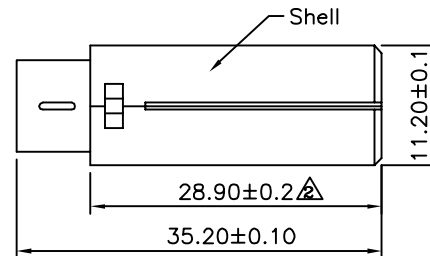


△ SPECIFICATION

Rating: 100V AC 1A Max.
 Insulation Resistance: 50 Megaohms Min. At 500V DC
 Dielectric Strength: 500V AC/1 Minute
 Insertion Force: 4.5kg Max.
 Withdrawal Force: 0.9kg~3kg
 Cover: EVA+PE-LL
 Shell: ABS
 Metal Shield: Brass, Nickel Plated
 △ Housing: PA6+FB
 Contact: Brass, Silver Plated
 RoHS Compliant

△ MDA XX P - H
 (1) (2) (3) (4)

(1) MDA: Mini Din Solder Wire Assembly Type
 (2) XX: No. Of Position
 (3) P: Male
 (4) H: RoHS Compliant

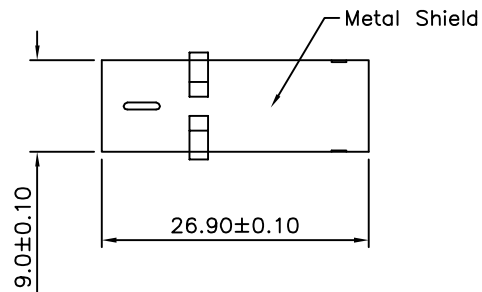

3P	4P	5P	6P	7P	8P

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY	
PART No. MDAXP-H		CHECKED BY HZF	
DRAWING No. MDAXP-H		DRAWING BY GAO	
SCALE NONE	REV.	B2	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
.X	±0.20
.XX	±0.10
ANG.	
UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
△ B2		Modify Data	HZF	08/23/2013
△ B1		Add UL94V-0	HZF	11/23/2010
△ B0		NEW RELEASE	EMILY	09/17/2008