
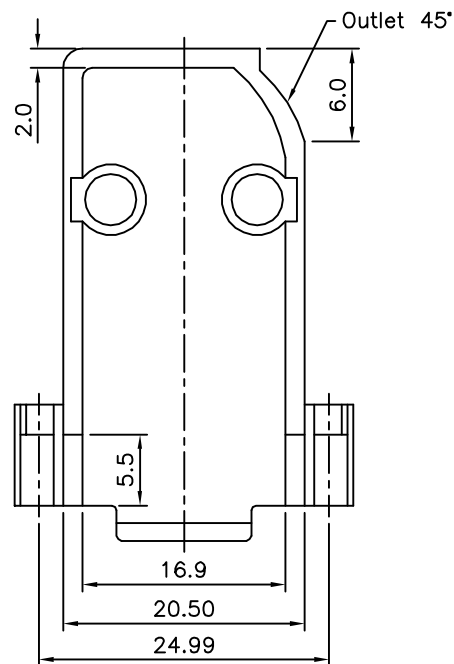
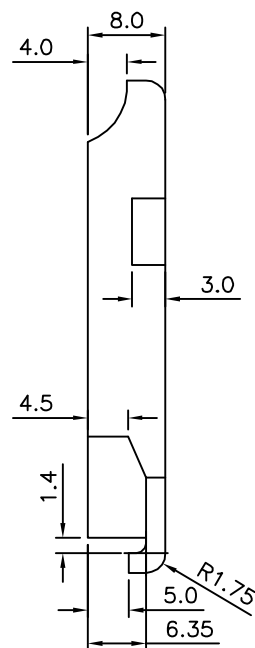






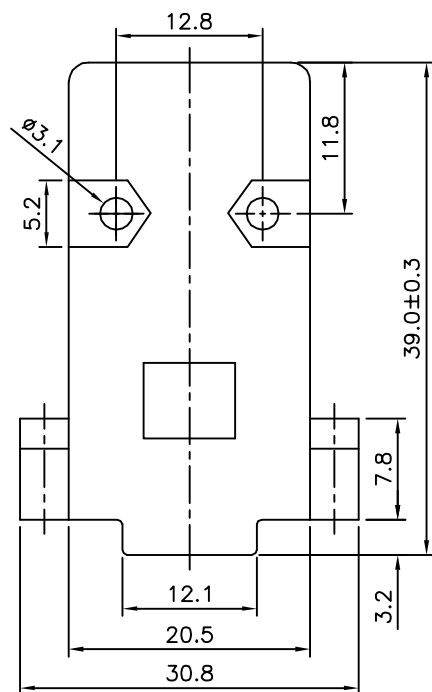


SPECIFICATION

⚠ Insulator:ABS(UL94HB)
Screw,Nut&SR:Steel,Nickel Plated
Packing:1 Set/Bag
RoHS Compliant

$$\triangle \frac{\text{DHR}}{(1)} \quad \frac{09}{(2)} \quad \frac{X}{(3)} \quad \frac{T}{(4)} - \frac{1}{(5)} - \frac{H}{(6)}$$

- (1) DHR:D-SUB Screw-On
Hood Cable Outlet 45°
- (2) 09:No. Of Position
- (3) X:D-SUB Hood Insulator Color
B:Beige
C:Chromate Plated
G:Gray
K:Black
- (4) T:With Thumbscrew
- (5) 1:One Bag/Set
- (6) H:RoHS Compliant

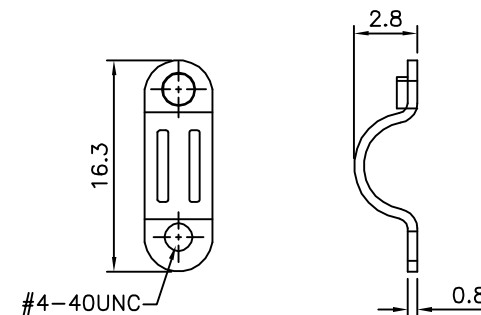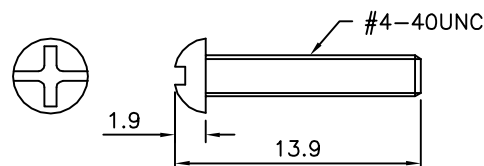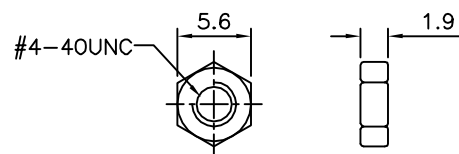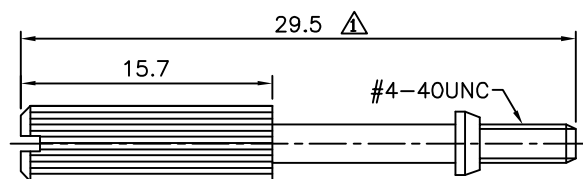

CATEGORY		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. 							
PART No. DHR09XT-1-H		CHECKED BY HZF				 A2	Add P/N Code		HZF	07/09/2014	
DRAWING No. DHR09XT-1-H		DRAWING BY SONG				 A1	Modify Data		HZF	12/10/2008	
						 A0	NEW RELEASE		HZF	02/07/2008	
SCALE	NONE	REV.	A2	UNIT mm		NO. REV.	REVISIONS		CHK	DATE	