
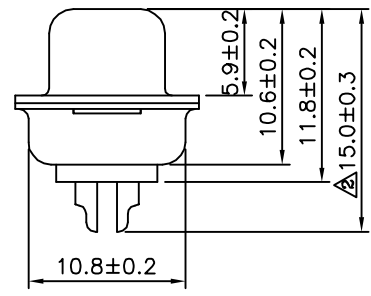
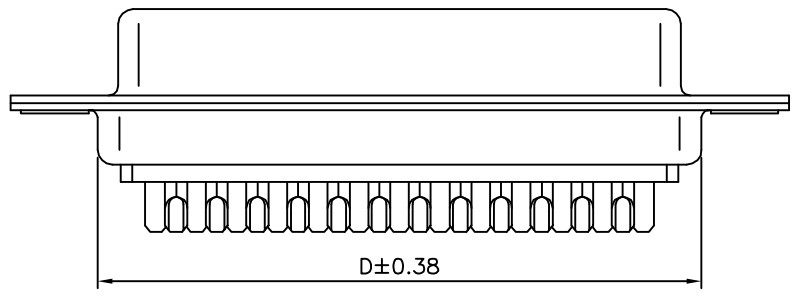


**SPECIFICATION**

Current Rating:1 Amp  
 Voltage Rating:250V  
 Dielectric Withstanding Voltage:500V AC RMS  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:5000 Megaohms Min.  
 Operation Temperature:-55°C~+125°C  
 Insulator:PBT+30%G.F.(UL94V-0)  
 △ Contact:Brass,Gold Flash On Contact Area,  
 Tin Plated On Solder Tails,Over Nickel  
 Shell:Steel,Tin Plated On Back Shell  
 Nickel Plated On Front Shell  
 RoHS Compliant

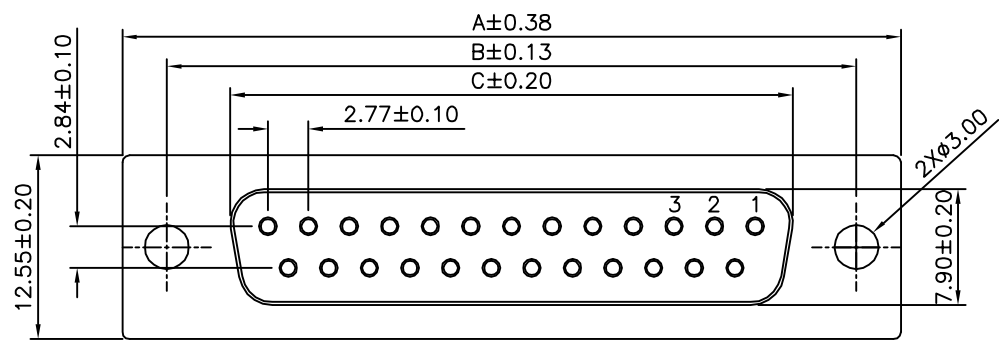

- DS XX S T - XX - H  
 (1) (2) (3) (4) (5) (6)
- (1) DS:D-SUB Solder Type
  - (2) XX:No. Of Position  
 09:09 Position  
 15:15 Position  
 25:25 Position  
 37:37 Position
  - (3) S:Female
  - (4) T:Tray
  - (5) XX:Insulator Color  
 Blank:Blue  
 BK:Black  
 WH:White
  - (6) H:RoHS Compliant

Pin	A	B	C	D
09	30.80	24.99	16.33	19.28
15	39.20	33.32	24.66	27.65
25	53.10	47.04	38.35	41.20
37	69.40	63.50	54.80	57.44

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X ±0.50 XX ±0.38 XXX ±0.25 ANG. ±2°
PART No. DSXXST-XX-H		CHECKED BY HZF		
DRAWING No. DSXXST-XX-H		DRAWING BY CYP		
SCALE	NONE	REV.	A2	
UNIT mm				

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Dim.	HZF	06/15/2015
△A1		Modify Data	HZF	11/05/2014
△A0		NEW RELEASE	HZF	02/25/2010