




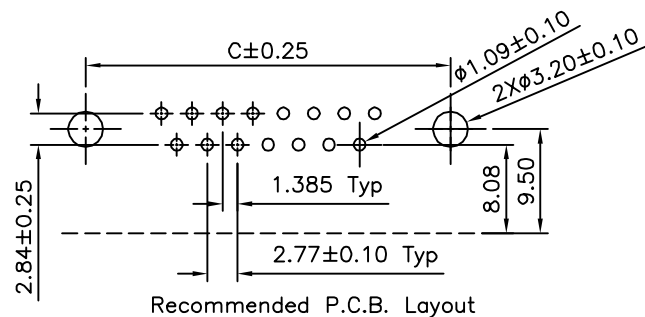


SPECIFICATION

⚠ Current Rating: 1 Amps
Withstanding Voltage: 1000V (One Minute)
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
At 500V DC
Operating Temperature: -50°C ~ +105°C
Shell: SPCC, Nickel Plated
Insulator: PBT+30%G.F. (UL94V-0)
Contact: Brass, Gold Flash On Contact Area,
Tin Plated On Solder Tails, Over Nickel
Z Flake: SPCC, Tin Plated
Screw: 12L14, Nickel Plated
RoHS Compliant

DR XX P - XX - H
(1) (2) (3) (4) (5)

- (1) DR: D-SUB DIP Right Angle
(2) XX: No. Of Position
(3) P: Male Boardlock With 2 Jackscrew
4#40 Installed
(4) XX: Insulator Color
Blank: Black
BL: Blue
(5) H: RoHS Compliant

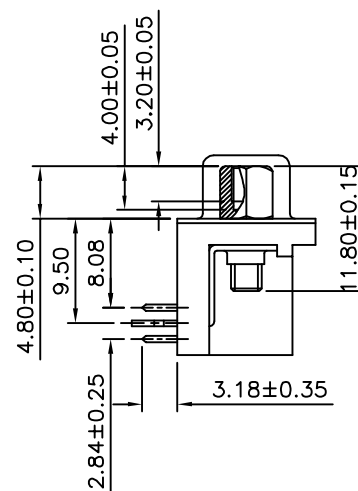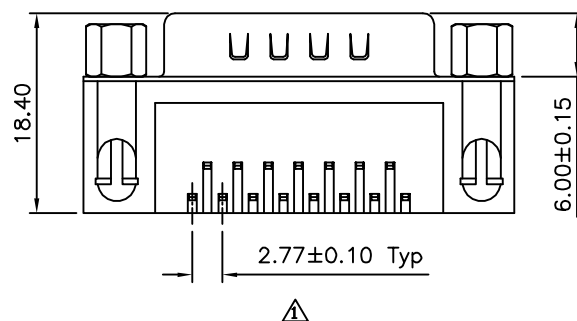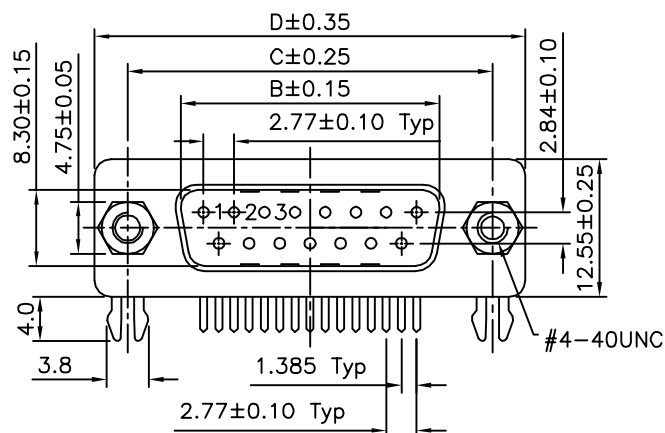

Pin	B	C	D
09	16.92	24.99	30.81
15	25.25	33.32	39.20
25	38.96	47.04	53.04
37	55.42	63.50	69.40

AUK

A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY

APPROVED BY

MEI

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

PART No.

CHECKED BY

HZF

DRAWING No.

DRAWING BY


SONG

SCALE

NONE

REV.

B1

UNIT
mm

⚠	B1	Modify Data	HZF	02/24/2014
⚠	B0	Modify P/N:DRXXP-H --> DRXXP-XX-H	HZF	08/07/2013
⚠	B0	NEW RELEASE	HZF	08/07/2013
NO REV.	REVISIONS		CHK	DATE