



SPECIFICATION

△ Current Rating: 1 Amp
 Withstanding Voltage: 1000V (One Minute)
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 At 500V DC
 Operation Temperature: -50°C ~ +105°C
 Insulator: PBT+30%G.F. (UL94V-0)
 Shell: SPCC, Nickel Plated
 Contact: Brass
 Boardlock: SPCC, Tin Plated
 Screw: 12L14, Nickel Plated
 RoHS Compliant



DR XX S - XX - SXX - H
 (1) (2) (3) (4) (5) (6)

- DR: D-SUB DIP Right Angle
- XX: No. Of Position
- S: Female Boardlock With 2 Jackscrew #4/40 Installed
- XX: Insulator Color
Blank: Black
BL: Blue
- SXX: Contact Finish
Blank: Gold Flash On Contact Area
Tin Plated On Solder Tails, Over Nickel
S15: Gold Plated 15u" On Contact Area
Tin Plated On Solder Tails, Over Nickel
S30: Gold Plated 30u" On Contact Area
Tin Plated On Solder Tails, Over Nickel
- H: RoHS Compliant


Pin	A	C	D
09	16.33	24.99	30.81
15	24.80	33.32	39.20
25	38.38	47.04	53.04
37	54.84	63.50	69.40

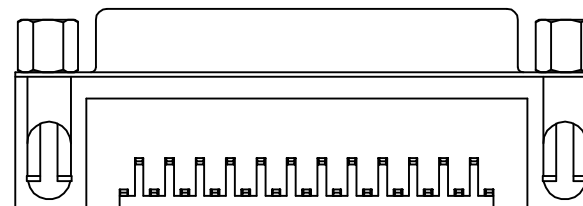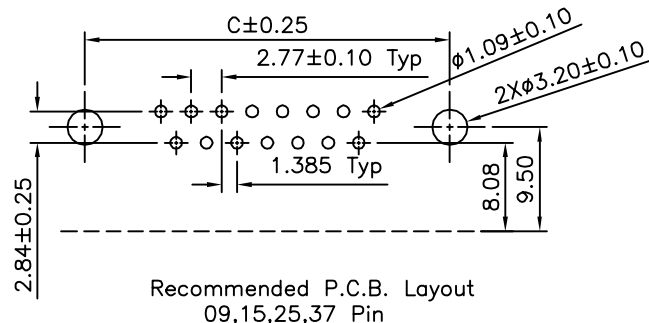

△ 25 Pin

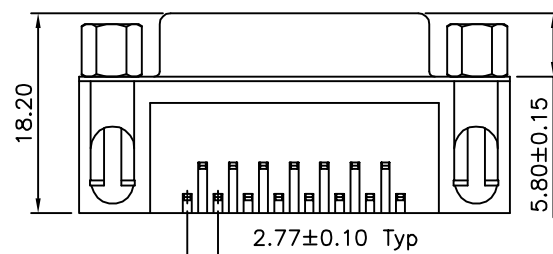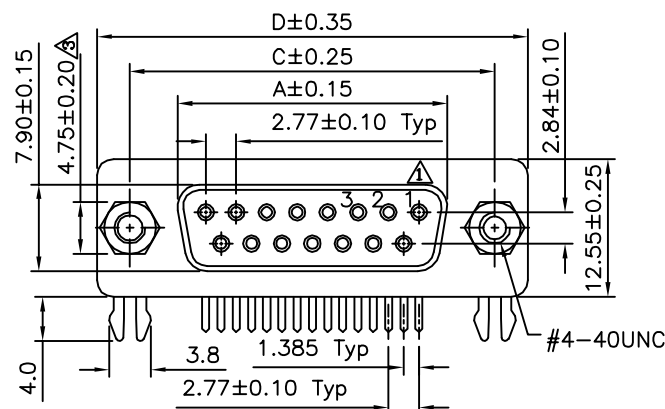

△ 09,15,37 Pin

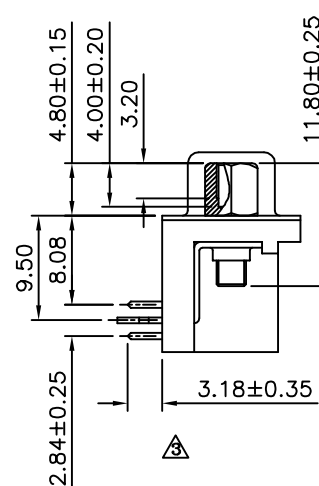

△

CATEGORY		APPROVED BY	
PART No. DRXXS-XX-SXX-H		MEI	
DRAWING No. DRXXS-XX-SXX-H		CHECKED BY	
SCALE		HZF	
NONE		DRAWING BY	
REV.		CYP	
C3		UNIT	
mm		C3	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
.X ±0.38	.X* ±3°		
.XX ±0.25	.XX* ±1°		
.XXX ±0.05	.XXX* ±0.5°		

NO.	REV.	REVISIONS	CHK	DATE
△	C3	Modify Data	HZF	07/22/2015
△	C2	Modify Data	HZF	12/27/2013
△	C1	Modify Data	HZF	08/12/2013
△	C0	NEW RELEASE	HZF	05/24/2013