
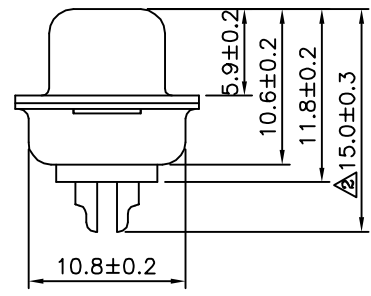
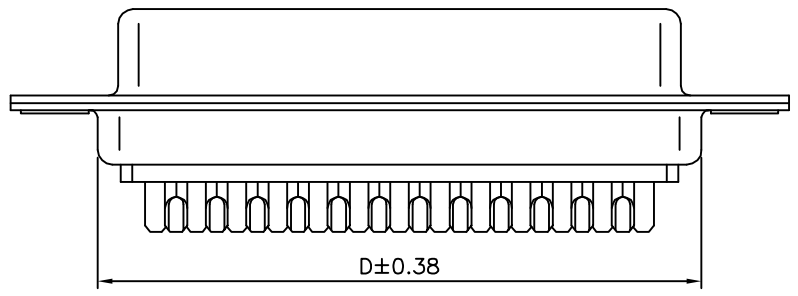


**SPECIFICATION**

Current Rating:1 Amp  
 Voltage Rating:250V  
 Dielectric Withstanding Voltage:500V AC RMS  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:5000 Megaohms Min.  
 Operation Temperature:-55°C~+125°C  
 Insulator:PBT+30%G.F.(UL94V-0)  
 △ Contact:Brass,Gold Flash On Contact Area,  
 Tin Plated On Solder Tails,Over Nickel  
 Shell:Steel,Tin Plated On Back Shell  
 Nickel Plated On Front Shell  
 RoHS Compliant

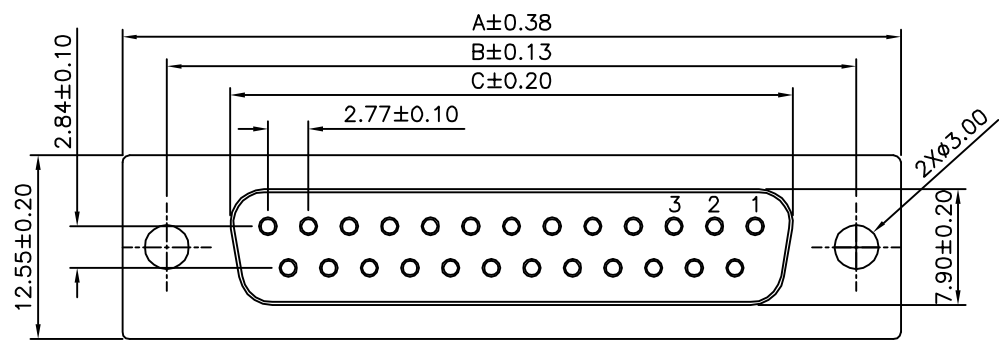

- DS XX S T - XX - H  
 (1) (2) (3) (4) (5) (6)
- (1) DS:D-SUB Solder Type
  - (2) XX:No. Of Position  
 09:09 Position  
 15:15 Position  
 25:25 Position  
 37:37 Position
  - (3) S:Female
  - (4) T:Tray
  - (5) XX:Insulator Color  
 Blank:Blue  
 BK:Black  
 WH:White
  - (6) H:RoHS Compliant

| Pin | A     | B     | C     | D     |
|-----|-------|-------|-------|-------|
| 09  | 30.80 | 24.99 | 16.33 | 19.28 |
| 15  | 39.20 | 33.32 | 24.66 | 27.65 |
| 25  | 53.10 | 47.04 | 38.35 | 41.20 |
| 37  | 69.40 | 63.50 | 54.80 | 57.44 |

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

|                            |      |                      |    |   |
|----------------------------|------|----------------------|----|---|
| CATEGORY                   |      | APPROVED BY<br>EMILY |    | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br>X ±0.50<br>XX ±0.38<br>XXX ±0.25<br>ANG. ±2° |
| PART No.<br>DSXXST-XX-H    |      | CHECKED BY<br>HZF    |    |   |
| DRAWING No.<br>DSXXST-XX-H |      | DRAWING BY<br>CYP    |    |   |
| SCALE                      | NONE | REV.                 | A2 |   |
| UNIT<br>mm                 |      |                      |    |   |

| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| △A2 |      | Modify Dim. | HZF | 06/15/2015 |
| △A1 |      | Modify Data | HZF | 11/05/2014 |
| △A0 |      | NEW RELEASE | HZF | 02/25/2010 |