


SPECIFICATION

Current Rating:1A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:500V AC/Minute
Temperature Range:-40°C~+105°C
Insulator:PBT+G.F.(UL94V-0),Black
Contact:Brass,Gold Plated Over Nickel
RoHS Compliant

HAFCS 20 XX - H
(1) (2) (3) (4)

- (1) HAFCS:1.27X1.27 IDC Socket
For 0.635mm Flat Cable
- (2) 20:Without SR
- (3) XX:No. Of Position
- (4) H:RoHS Compliant

Pin	A	B
10	10.54	5.08
12	11.81	6.35
14	13.08	7.62
16	14.35	8.89
20	16.89	11.43
26	20.70	15.24
30	23.24	17.78
34	25.78	20.32
40	29.59	24.13
44	32.13	26.67
50	35.94	30.48
60	42.29	36.83
68	47.37	41.91
80	54.99	49.53
100	67.69	62.23

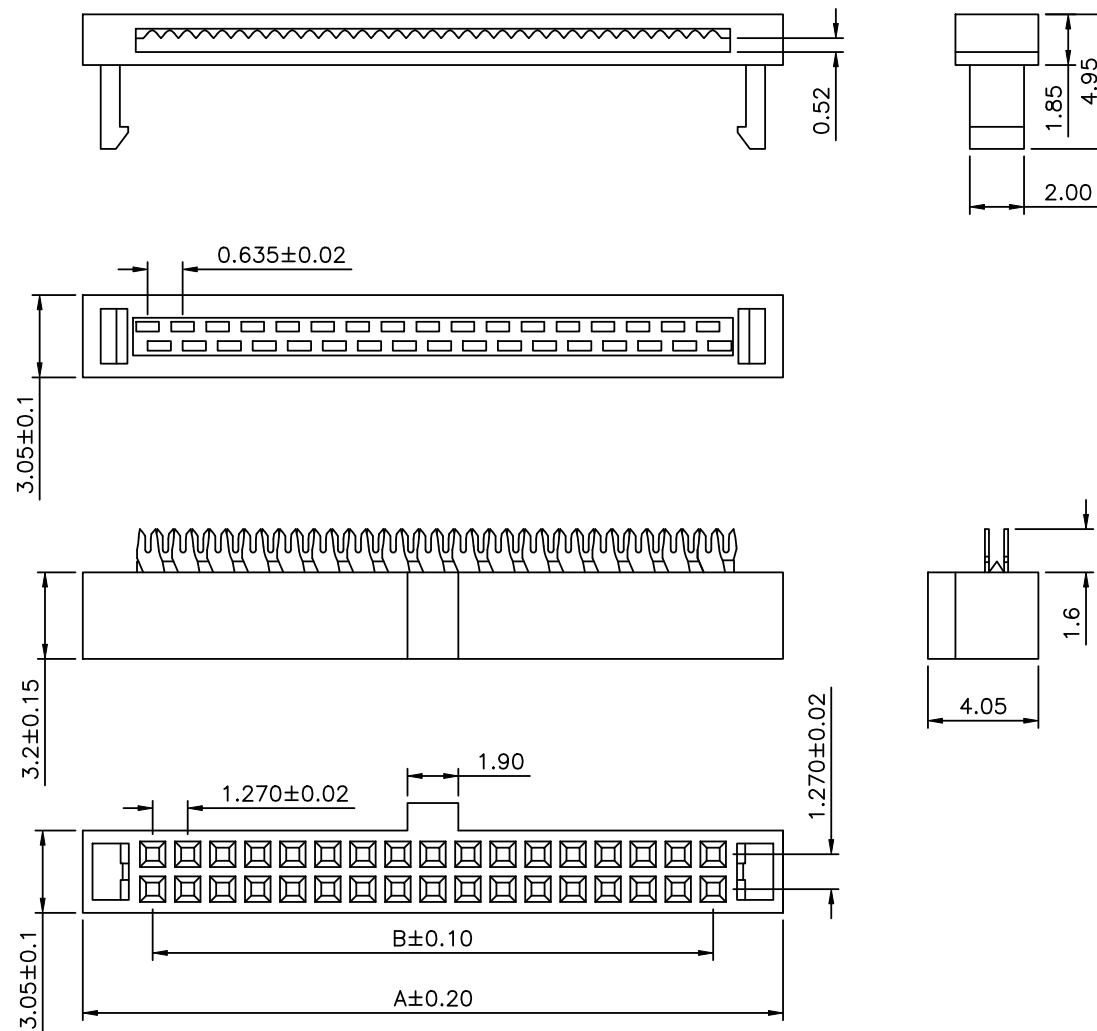

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	
PART No.		MEI	
HAFCS20XX-H		CHECKED BY	
HAFZ		HZF	
DRAWING No.		DRAWING BY	
HAFCS20XX-H		CYP	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20

UNIT mm

NO. REV.		REVISIONS		CHK	DATE
A0		NEW RELEASE		HZF	06/21/2016