




SPECIFICATION
 Current Rating:1 Amp
 Dielectric Strength:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-40°C~+105°C
 Housing:PBT+G.F.(UL94V-0)
 Contact:Brass,Selective Gold Plated Over Nickel
 RoHS Compliant

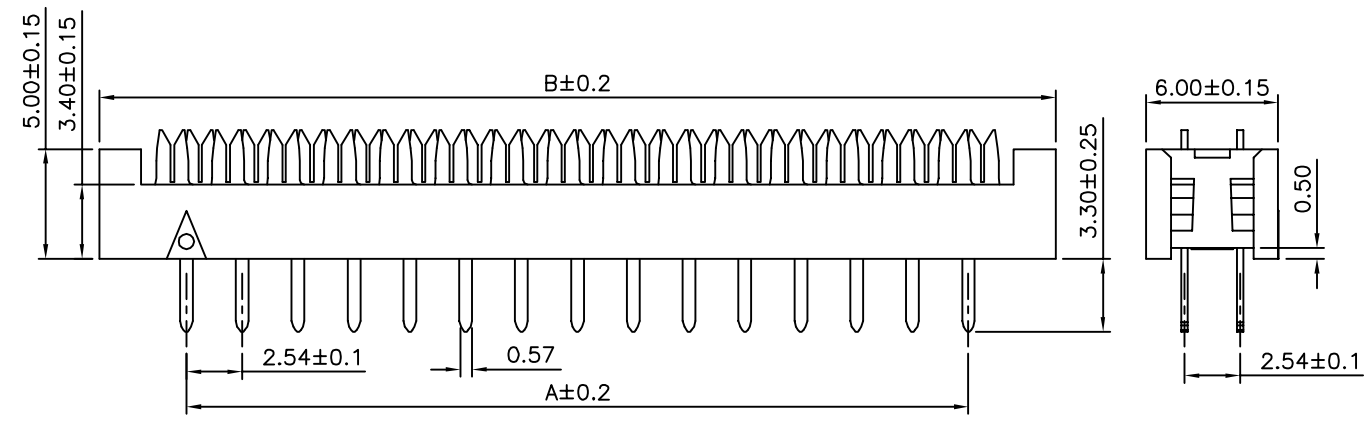

IP 01 XX - H
 (1) (2) (3) (4)
 (1) IP:2.54mm Plug IDC For
 1.27mm Flat Cable
 (2) 01:Row Pitch 0.1"
 (3) XX:No. Of Position
 (4) H:RoHS Compliant

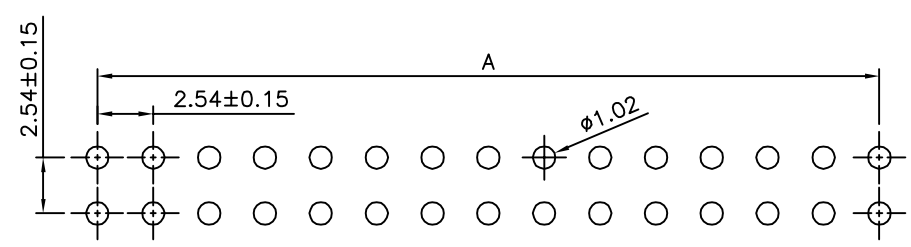

Recommended P.C.B. Layout

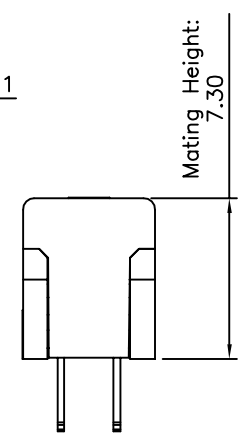

Pin	A	B
06	5.08	12.98
08	7.62	15.52
10	10.16	18.06
12	12.70	20.60
14	15.24	23.14
16	17.78	25.68
18	20.32	28.22
20	22.86	30.76
24	27.94	35.84
26	30.48	38.38
30	35.56	43.46
34	40.64	48.54
40	48.26	56.16
44	53.34	61.24
50	60.96	68.86
60	73.66	81.56
64	78.74	86.64

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 X' ±3.0" .X ±0.20 .X' ±2.0" .XX ±0.15 .XX' ±1.0" .XXX ±0.08 .XXX' ±0.5"					
PART No. IP01XX-H		MEI							
DRAWING No. IP01XX-H		CHECKED BY HZF							
		DRAWING BY SONG							
SCALE	NONE	REV.	A0	UNIT	mm	△ A0	NEW RELEASE	HZF	06/05/2012
				NO.REV.		REVISIONS		CHK	DATE