



SPECIFICATION

Current Rating:1 Amp Max.
Operation Voltage:150V AC Max.
Withstand Voltage:500V AC RMS
Contact Resistance:20 Milliohms Max.
Insulation Resistance:500 Megaohms Min.
Operation Temperature:-40°C~+85°C
Insulator&Cap:PA9T(UL94V-0),Nature
Contact:Brass,Tin Plated Over Nickel
Locating:Brass,Tin Plated Over Nickel
RoHS Compliant




FH XX V C - R1K - H
(1) (2) (3) (4) (5) (6)

- (1) FH:1.25 FH Series
(2) XX:No. Of Position
(3) V:SMT Straight
(4) C:With Cap
(5) R1K:Tape&Reel 1000 PCS/Reel
(6) H:RoHS Compliant




Pin	A	B	C
2	1.25	3.05	7.65
3	2.50	4.30	8.90
4	3.75	5.55	10.15
5	5.00	6.80	11.40
6	6.25	8.05	12.65
7	7.50	9.30	13.90
8	8.75	10.55	15.15
9	10.00	11.80	16.40
10	11.25	13.05	17.65
11	12.50	14.30	18.90
12	13.75	15.55	20.15
13	15.00	16.80	21.40
14	16.25	18.05	22.65
15	17.50	19.30	23.90
16	18.75	20.55	25.15
17	20.00	21.80	26.40
18	21.25	23.05	27.65
19	22.50	24.30	28.90
20	23.75	25.55	30.15

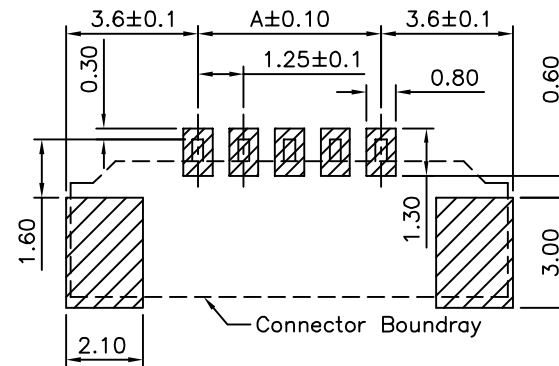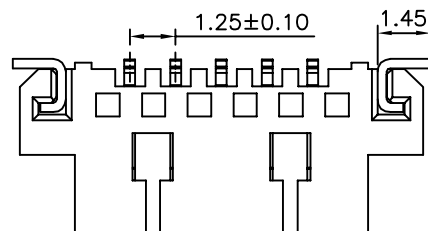

Recommended P.C.B. Layout

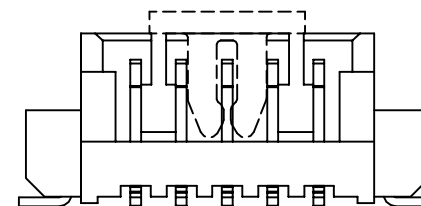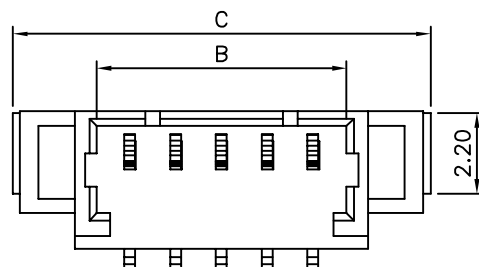

Odd Number

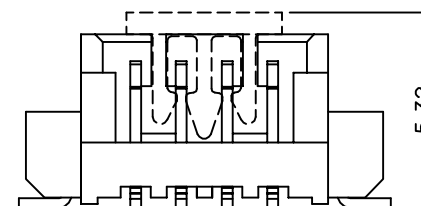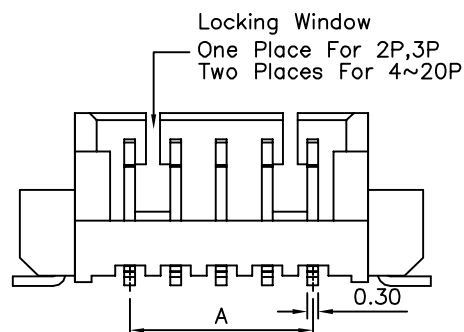

Dual Numbers

AUK

A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY

APPROVED BY

MEI

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20
ANG.

PART No.

FHXXVC-R1K-H

CHECKED BY

HZF

DRAWING No.

FHXXVC-R1K-H

DRAWING BY


CYP

SCALE

NONE

REV.

A2

UNIT
mm

NO. REV.

REVISIONS

CHK

DATE

A2

Modify Data

HZF

08/31/2015

A1

Modify Data

HZF

02/20/2013

A0

NEW RELEASE

HZF

05/07/2012