

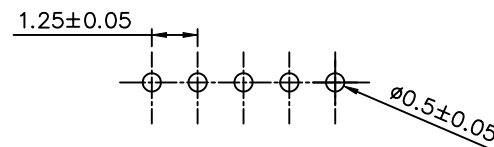
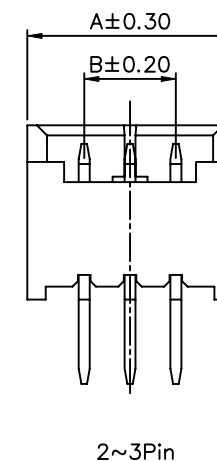


SPECIFICATION


Current Rating: 1A AC/DC
Voltage Rating: 125V AC/DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 500 Megaohms Min.
Withstanding Voltage: 500V AC/Minute
⚠ Insulator: PA66+30%GF UL94V-0, Natural
Pin: Brass,
Underplated: Nickel
Whole Tin Plated
RoHS Compliant



Recommended P.C.B Layout (Top Side)
(Tolerance=±0.05)

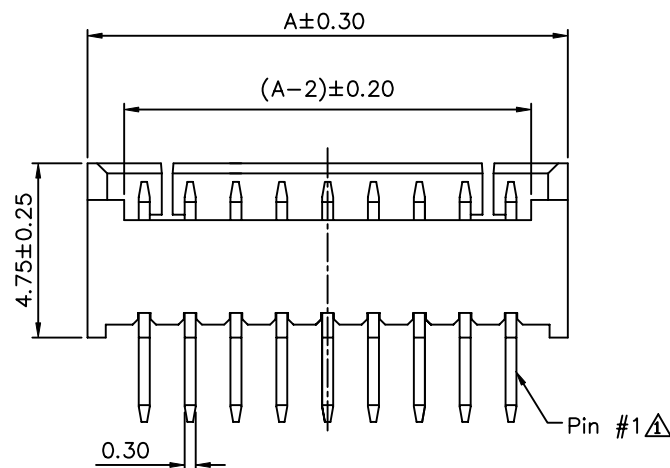

Pin	A	B
2	4.25	1.25
3	5.50	2.50
4	6.75	3.75
5	8.00	5.00
6	9.25	6.25
7	10.50	7.50
8	11.75	8.75
9	13.00	10.00
10	14.25	11.25
11	15.50	12.50
12	16.75	13.75
13	18.00	15.00
14	19.25	16.25
15	20.50	17.50
16	21.75	18.75

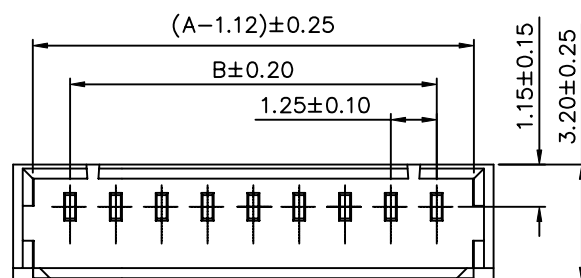

A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY

APPROVED BY

MEI

UNLESS OTHERWISE
SPECIFIED

PART No.

CHECKED BY

HZF

TOLERANCES ARE
~10 ±0.15
20~30 ±0.30
30~ ±0.50
ANG ±2°

DRAWING No.

DRAWING BY

PEGA

SCALE

NONE

REV.

B1

UNIT
mm

NO. REV.

B1 Add Pin1 And Color

HZF

03/20/2009

B0 NEW RELEASE

HZF

12/05/2006

REVISIONS

CHK

DATE