



SPECIFICATION


Current Rating:2.5A AC/DC
Voltage Rating:250V AC/DC
Temperature Range:-25°C~+85°C
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:600V AC/Minute
Insulator:PBT UL94V-0,Black
Contact:Brass,Gold Flash
RoHS Compliant






4P~18P




3P



2P

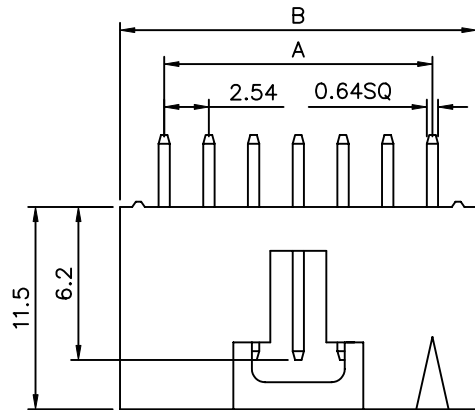

Recommended P.C. Board Layout



Poles	A	B
02	2.54	7.62
03	5.08	10.16
04	7.62	12.70
05	10.16	15.24
06	12.70	17.78
07	15.24	20.32
08	17.78	22.86
09	20.32	25.40
10	22.86	27.94
11	25.40	30.48
12	27.94	33.02
13	30.48	35.56
14	33.02	38.10
15	35.56	40.64
16	38.10	43.18
17	40.64	45.72
18	43.18	48.26

CATEGORY		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. 							
PART No. △ MCGXXDG-H		CHECKED BY BECKY				△ B2	Modify 4P → 2P			HZF	03/09/2009
DRAWING No. MCGXXDG-H		DRAWING BY XYH				△ B1	Modify MCGXXD → MCGXXDG			INGRID	12/06/2007
						△ B0	NEW RELEASE			BECKY	06/07/2006
SCALE	NONE	REV.	B2	UNIT mm		NO. REV.	REVISIONS		CHK	DATE	