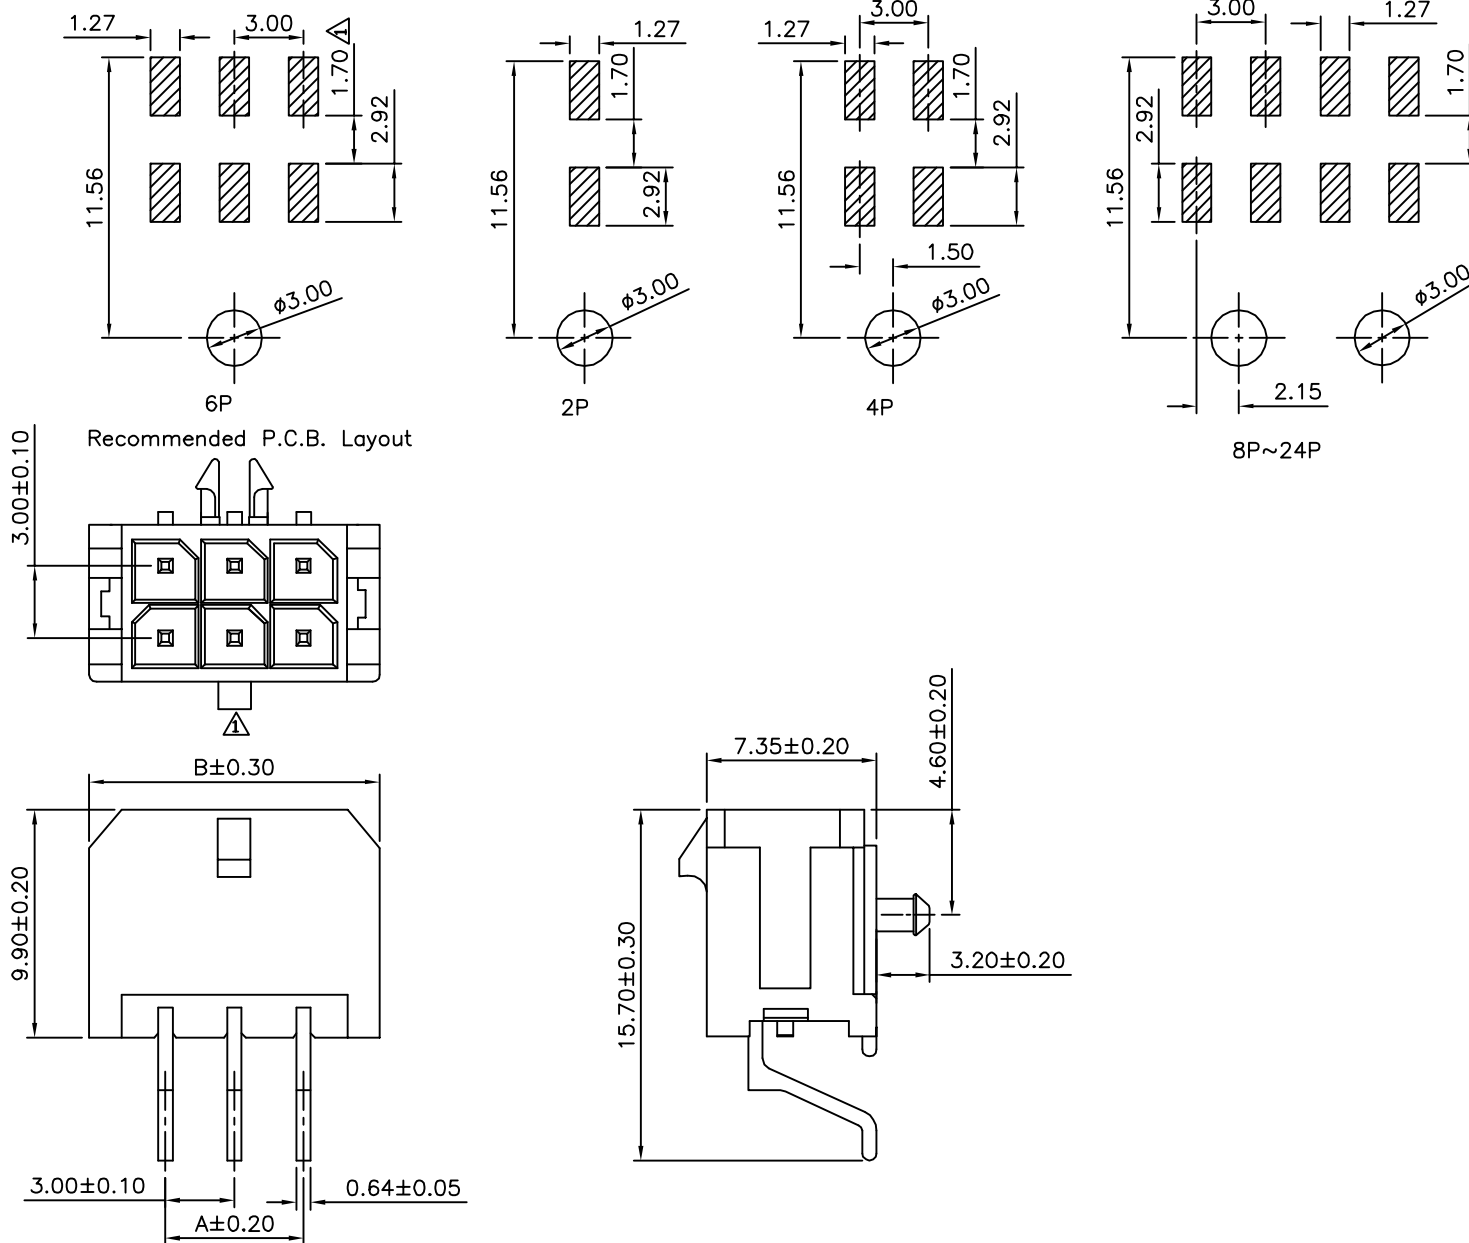


SPECIFICATION

1. General Characteristics
3.0mm Micro-Fit Wafer 2XXX SMT 90°
With Post Black Insulator Tin Plated
Tape&Reel 200 PCS/Reel
2. Material&Finish
Insulator:LCP(UL94V-0)
Contact:Brass,Tin Plated
3. Electrical Characteristics
Current Rating:5A AC,DC
Voltage Rating:250V AC,DC
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:1500V AC/Minute
4. Environmental Characteristics
Temperature Range:-25°C~+85°C
5. RoHS Compliant

- MIF 2 X XX P WP - R2H - H
- (1) (2) (3) (4) (5) (6) (7)
- (1) MIF:3.0mm Micro-Fit Series
(2) 2: Dual Row
(3) XX: No. Of Position/Per Row
(4) P: Male
(5) WP: SMT Right Angle With Post
(6) R2H: Tape&Reel 200 PCS/Reel
(7) H: RoHS Compliant

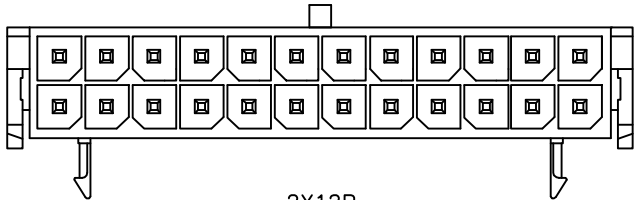
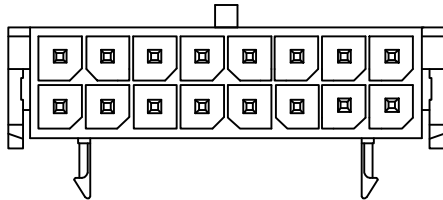

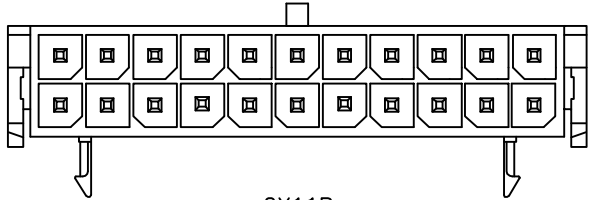
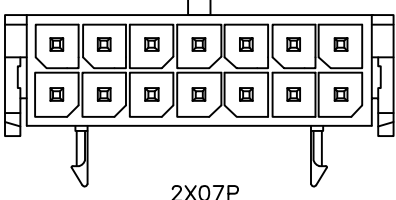

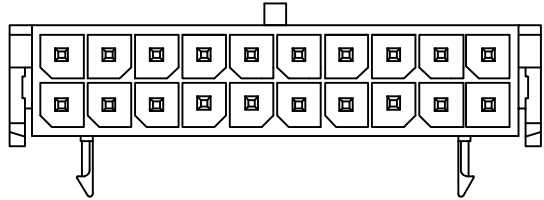
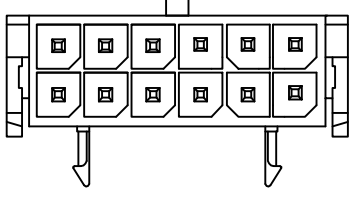

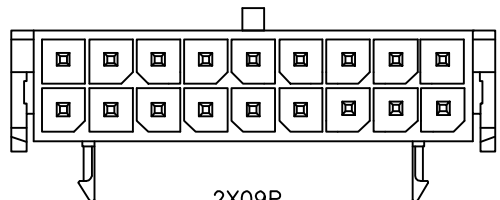


Pin	A	B
2	--	6.65
4	3.00	9.65
6	6.00	12.65
8	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65



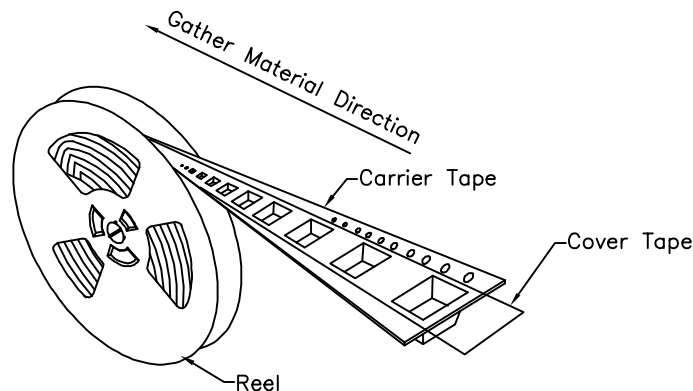

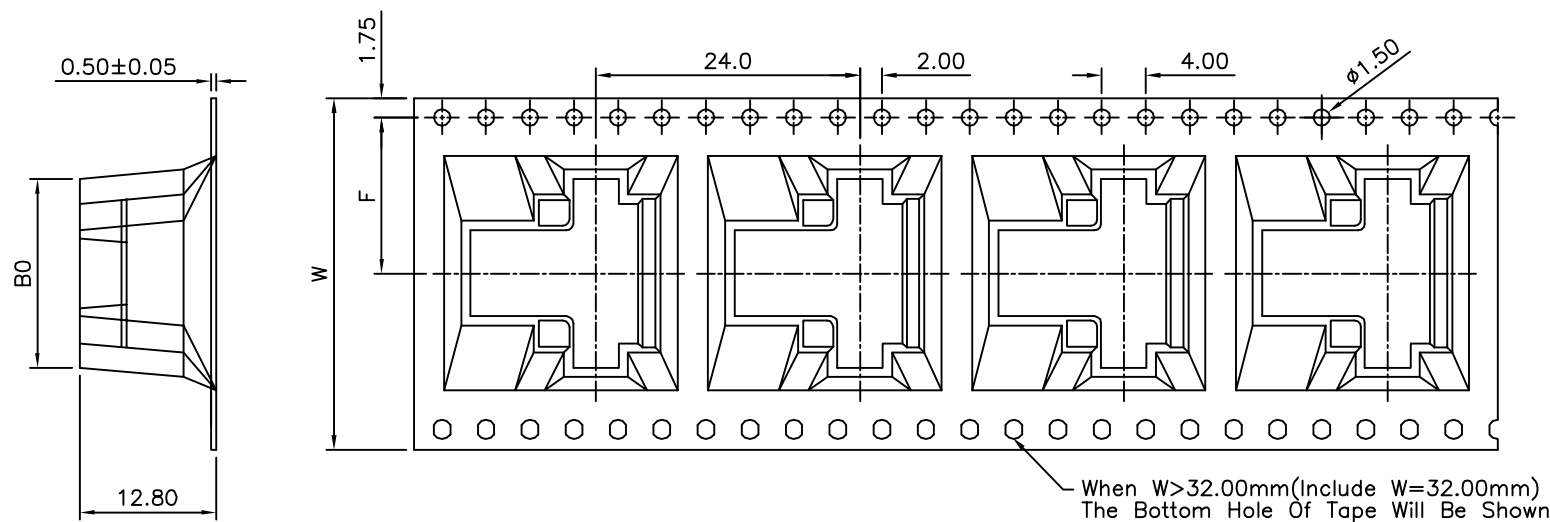
CATEGORY	APPROVED BY	MEI
PART No. Δ MIF2XXXPWP-R2H-H	CHECKED BY	HZF
DRAWING No. MIF2XXXPWP-R2H-H	DRAWING BY	CYP
SCALE	NONE	REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ± 0.30
.X ± 0.25
.XX ± 0.20
.XXX ± 0.015
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
Δ A1	Modify	P/N: MIF2XXXPWP-H --> MIF2XXXPWP-R2H-H	HZF	12/18/2014
Δ A0	NEW RELEASE		HZF	04/30/2012

		1		2		3		4		5		6		7		8		9		0		
																File No.		714EL18801		SHEET 2/3 ⚠		
J																						J
I																						I
H																						H
																						
		2X12P				2X08P				2X04P												
G																						G
F																						
		2X11P				2X07P				2X03P												
E																						E
D																						
		2X10P				2X06P				2X02P												
C																						C
B																						
		2X09P				2X05P				2X01P												
A																						A
 A MEMBER OF AUK GROUP 太聯事業股份有限公司 AUK CONTRACTORS CO., LTD.		CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.015																
		PART No. ⚠		MEI																		
		MIF2XXXPWP-R2H-H		CHECKED BY																		
		DRAWING No.		DRAWING BY																		
		MIF2XXXPWP-R2H-H		CYP																		
SCALE		NONE		REV.		A1		UNIT		mm		NO. REV.		REVISIONS		CHK		DATE				

SPECIFICATION
Q'ty:200 PCS/Reel
RoHS Compliant



Pin	W	F	B0
02	24.0	11.50	11.0
04	32.0	14.20	13.90
06	32.0	14.20	16.90
08	44.0	20.20	20.50
10	44.0	20.20	22.90
12	44.0	20.20	25.90
14	44.0	20.20	28.90
16	56.0	26.00	31.80
22	56.0	26.00	40.85
24	72.0	34.00	44.20

CATEGORY		APPROVED BY	
PART No. MIF2XXXPWP-R2H-H		MEI	
DRAWING No. MIF2XXXPWP-R2H-H		CHECKED BY HZF	
		DRAWING BY CYP	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X.	±0.30
.X	±0.25
.XX	±0.20
.XXX	±0.015
UNIT	mm

NO.		REV.	REVISIONS	CHK	DATE
A1		Modify	P/N:MIF2XXXPWP-H --> MIF2XXXPWP-R2H-H	HZF	12/18/2014
A0		NEW RELEASE		HZF	04/30/2012