
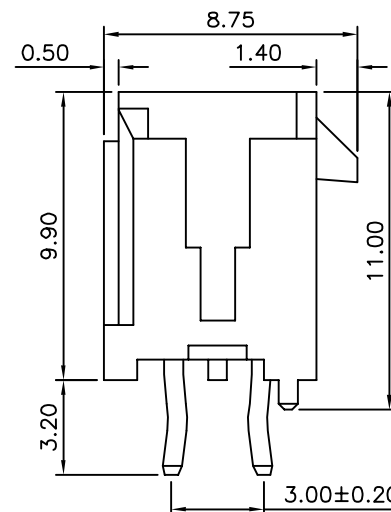
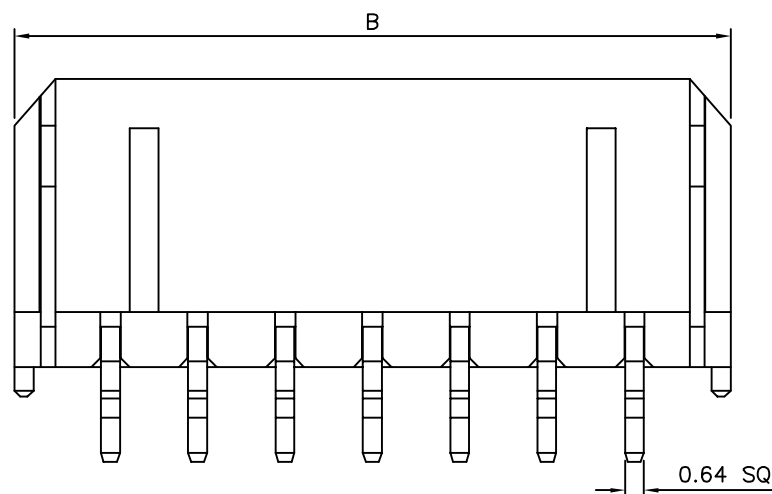
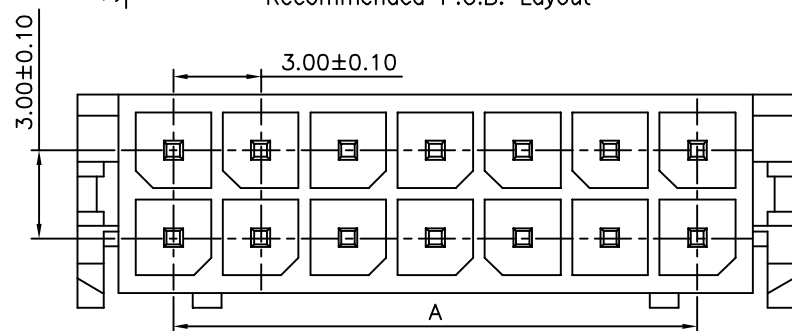


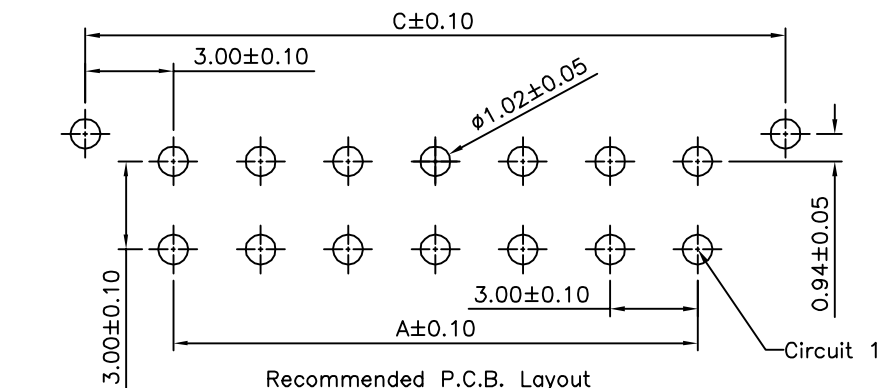

SPECIFICATION

1.General Characteristics

3.0mm Micro-Fit Wafer 2XXX DIP 180° With Post Black Insulator Tin Plated

2.Material&Finish

Housing:PA66(UL94V-0),Black

Terminal:Brass,Tin Plated

3.Electrical Characteristics

Current Rating:5A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:10 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

Dielectric Voltage:1500V AC/Minute

4.Environmental Characteristics

Temperature Range: -25°C~+85°C

5.RoHS Compliant

MIF 2 X XX P DP - H
(1) (2) (3) (4) (5) (6)

(1) MIF:3.0mm Micro-Fit Series

(2) 2: Dual Row

(3) XX: No. Of Position/Per Row

(4) P: Male

(5) DP: DIP Straight With Post

(6) H: RoHS Compliant

Pin	A	B	C
2	—	6.65	6.00
4	3.00	9.65	9.00
6	6.00	12.65	12.00
8	9.00	15.65	15.00
10	12.00	18.65	18.00
12	15.00	21.65	21.00
14	18.00	24.65	24.00
16	21.00	27.65	27.00
18	24.00	30.65	30.00
20	27.00	33.65	33.00
22	30.00	36.65	36.00
24	33.00	39.65	39.00



A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY

APPROVED BY

EMILY

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

PART No.

CHECKED BY

HZF

DRAWING No.

DRAWING BY

CYP

SCALE

NONE

REV.

B0

UNIT

mm

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE.X ± 0.50
.XX ± 0.25
.XXX ± 0.10
ANG. $\pm 2^\circ$

BO

NEW RELEASE

HZF


01/17/2015

NO. REV.

REVISIONS

CHK

DATE

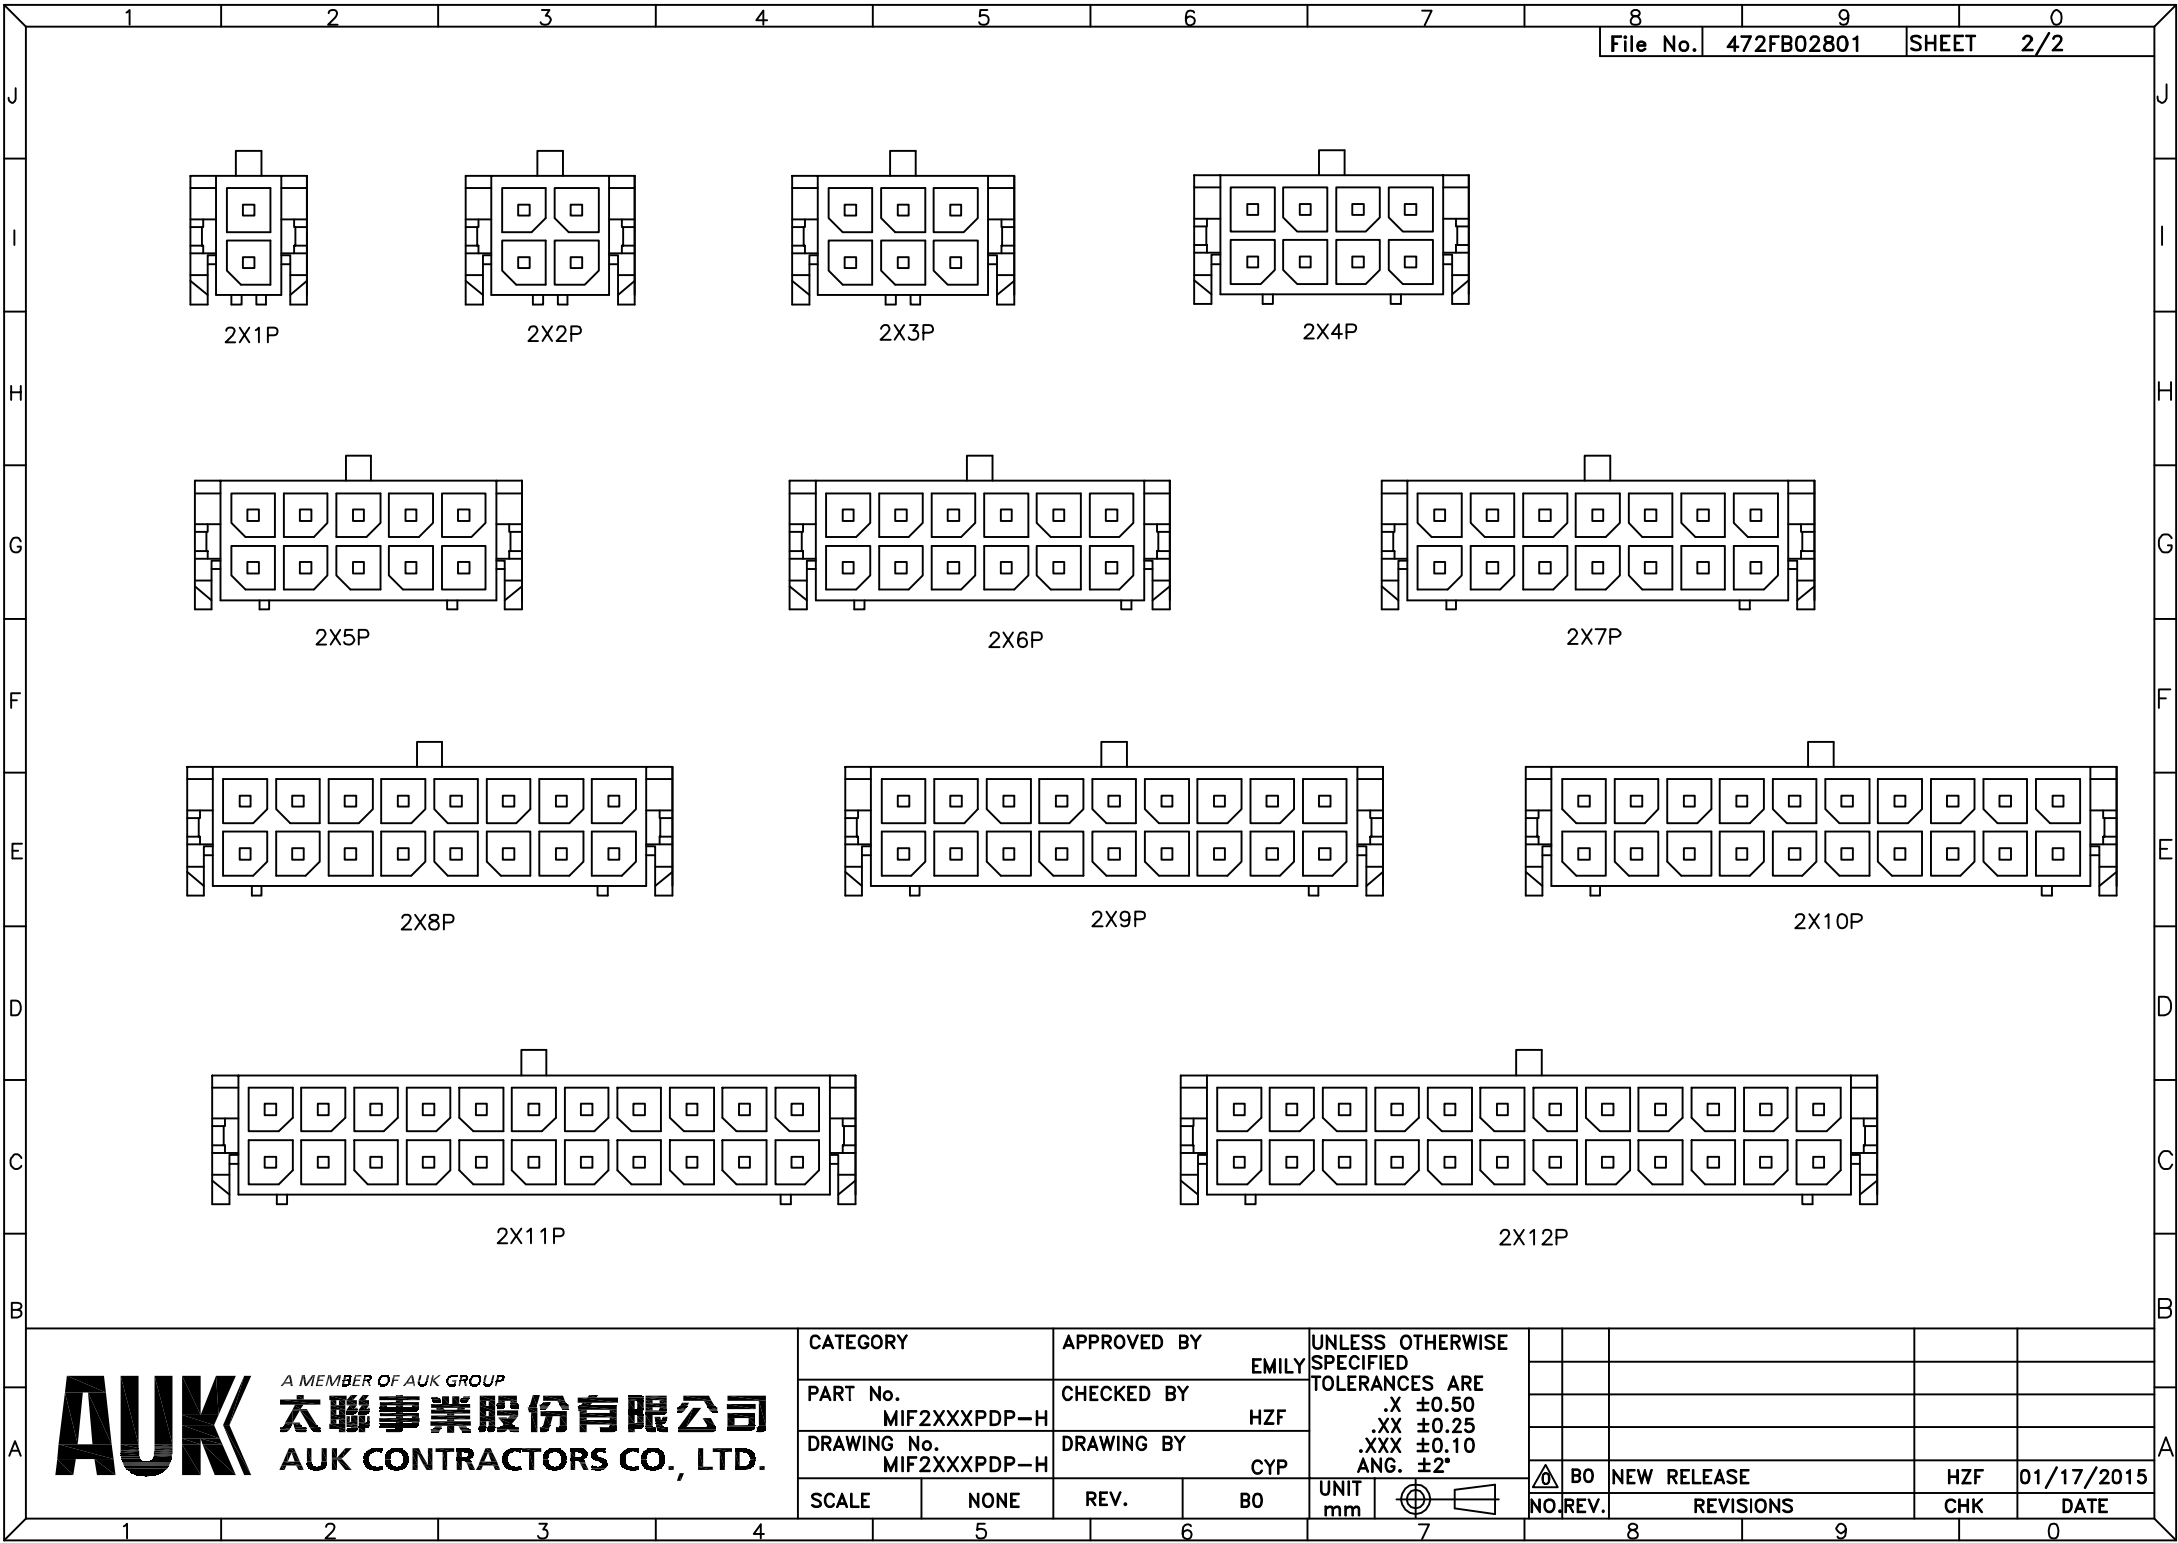

A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY	
PART No. MIF2XXXPDP-H		CHECKED BY HZF	
DRAWING No. MIF2XXXPDP-H		DRAWING BY CYP	
SCALE	NONE	REV.	B0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.50
.XX ±0.25
.XXX ±0.10
ANG. ±2°

NO.	REV.	REVISIONS	CHK	DATE
△ B0		NEW RELEASE	HZF	01/17/2015