
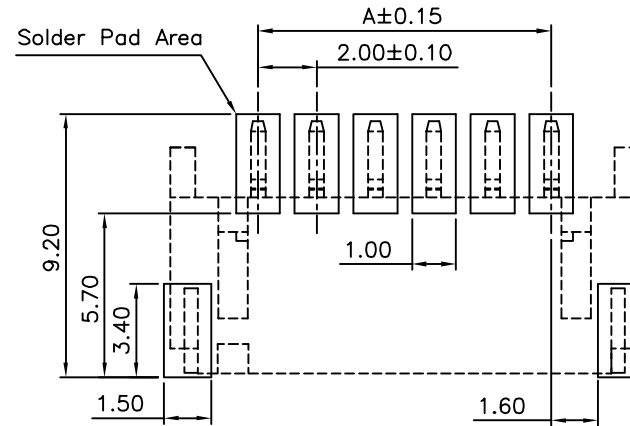


SPECIFICATION




Current Rating:2A AC/DC
Voltage Rating:100V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstanding Voltage:800V AC/Minute
Temperature Range:-25°C~+85°C
Insulator:PA9T(UL94V-0),Nature
Pin:Brass,Matte Tin Plated Over Nickel
Latch:Brass,Matte Tin Plated Over Nickel
RoHS Compliant

PH XX W - R1K - H
(1) (2) (3) (4) (5)

- (1) PH:PH 2.0 Series
- (2) XX:No. Of Position
- (3) W:SMT Right Angle
- (4) R1K:Tape & Reel 1000 PCS/Reel
- (5) H:RoHS Compliant

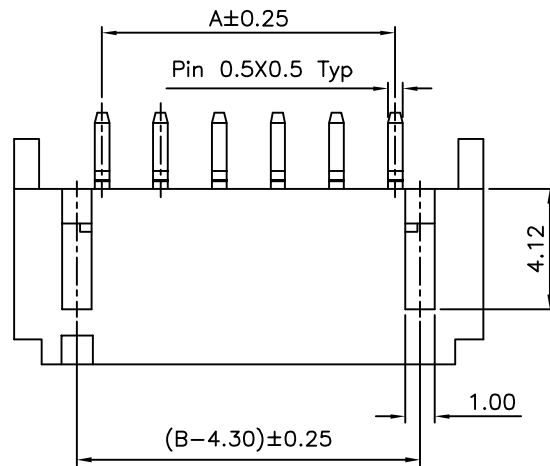


Recommended P.C.B Layout(Top Side)
P.C.B Thickness=1.20~1.60mm(Tolerance= ± 0.05)

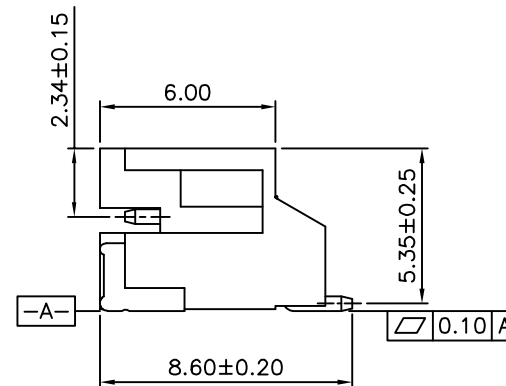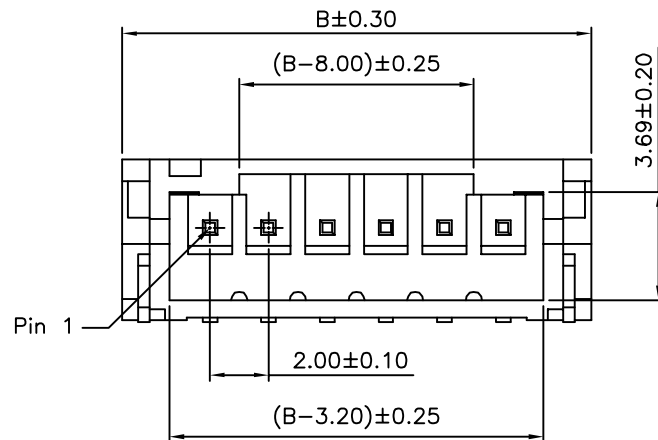

Pin	A	B	Pin	A	B
2	2.00	8.00	10	18.00	24.00
3	4.00	10.00	11	20.00	26.00
4	6.00	12.00	12	22.00	28.00
5	8.00	14.00	13	24.00	30.00
6	10.00	16.00	14	26.00	32.00
7	12.00	18.00	15	28.00	34.00
8	14.00	20.00	16	30.00	36.00
9	16.00	22.00			

SPECIFICATION

Peel Strength Of Cover Tape:30~130g
 Peeling Speed:250~300mm/Minute
 Peeling Angle:165°~175°
 Q'ty:1000 PCS/Reel
 RoHS Compliant

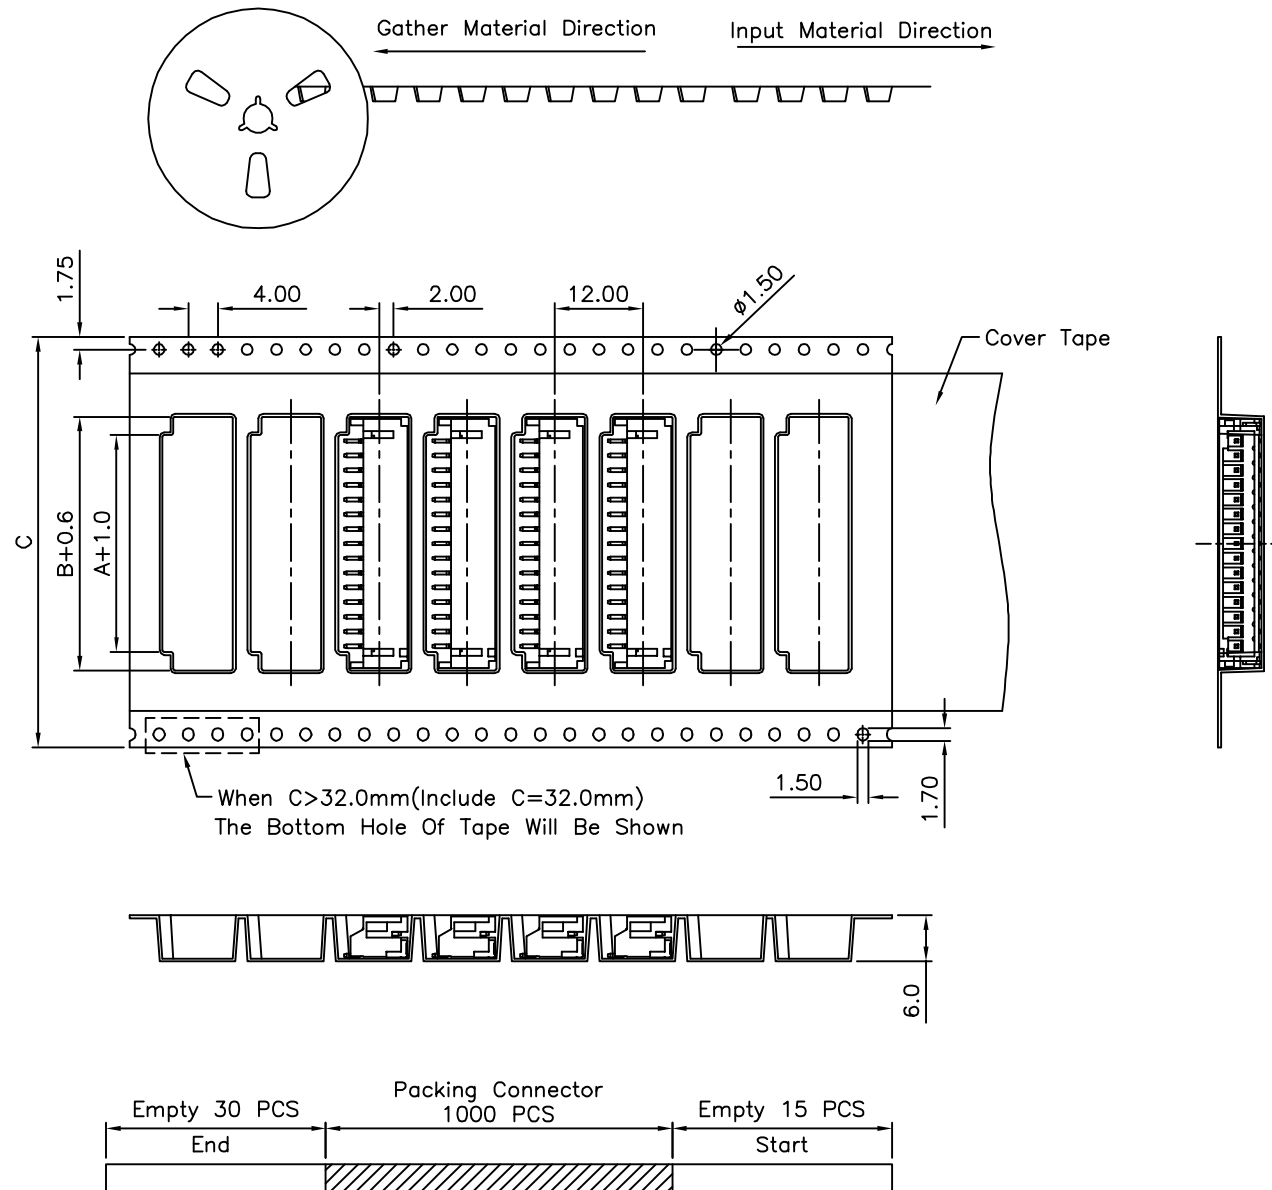

Pin	A	B	C
2	2.00	8.00	24.0
3	4.00	10.00	
4	6.00	12.00	
5	8.00	14.00	32.0
6	10.00	16.00	
7	12.00	18.00	
8	14.00	20.00	44.0
9	16.00	22.00	
10	18.00	24.00	
11	20.00	26.00	56.0
12	22.00	28.00	
13	24.00	30.00	
14	26.00	32.00	56.0
15	28.00	34.00	
16	30.00	36.00	