

SPECIFICATION

Current Rating:3A AC/DC

Voltage Rating:250V AC/DC

Withstanding Voltage:800V AC/Minute

Contact Resistance:20 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

Temperature Range:-25°C~+85°C

Pin:Brass,Tin Plated Over Nickel

Housing:PA66+15%G.F.(UL94V-0),Grey

RoHS Compliant




PHD XX D - H
(1) (2) (3) (4)

(1) PHD:2.0mm PHD Series

(2) XX:No. Of Position

(3) D:DIP Straight

(4) H:RoHS Compliant

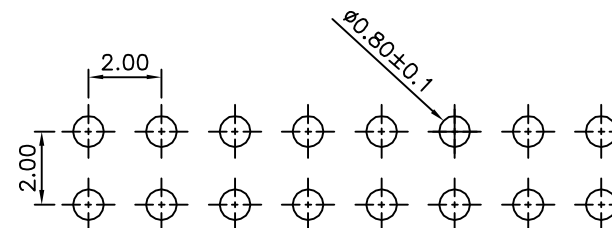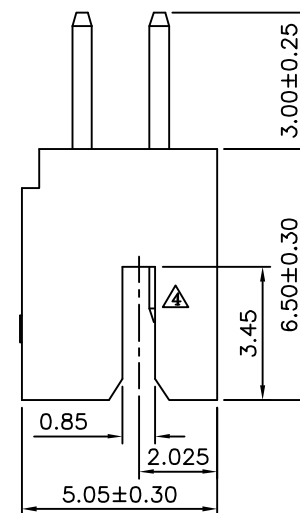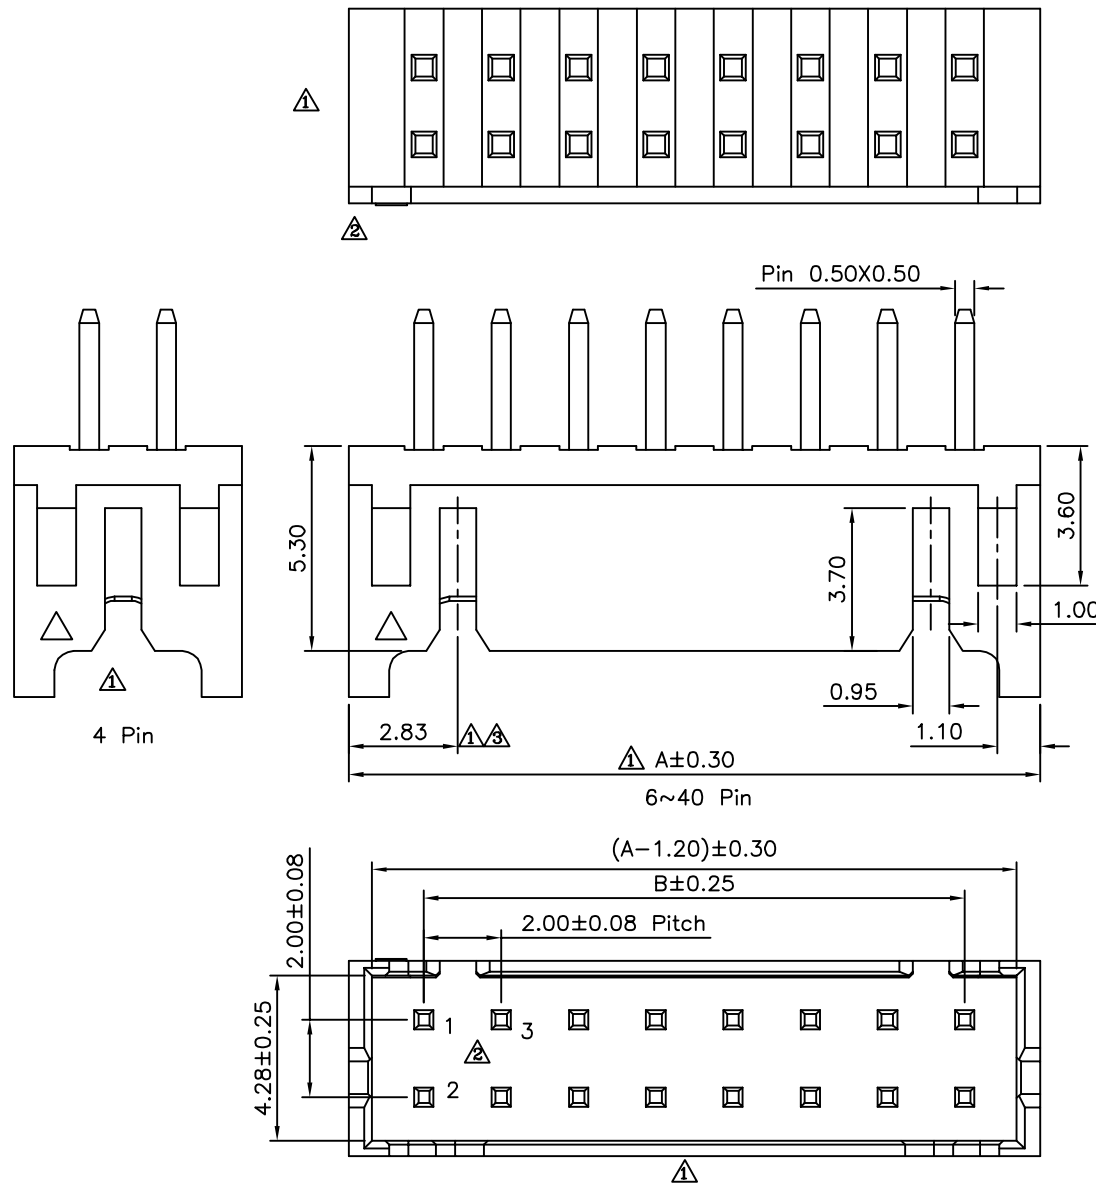

Recommended P.C.B. Layout(Top Side)
P.C.B Thickness=1.00~1.60mm(Tolerance=±0.05)

Pin	A	B
4	6.00	2.00
6	8.00	4.00
8	10.00	6.00
10	12.00	8.00
12	14.00	10.00
14	16.00	12.00
16	18.00	14.00
18	20.00	16.00
20	22.00	18.00
22	24.00	20.00
24	26.00	22.00
26	28.00	24.00
28	30.00	26.00
30	32.00	28.00
32	34.00	30.00
34	36.00	32.00
36	38.00	34.00
38	40.00	36.00
40	42.00	38.00



A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	B4	Modify Data	HZF	06/17/2014
PART No.	CHECKED BY	.X ±0.25 .XX ±0.20 .XXX ±0.10	B3	Modify Data	HZF	03/06/2013
DRAWING No.	DRAWING BY	.X* ±2° .XX* ±1°	B2	Add Pin No.	HZF	09/09/2009
SCALE	REV.	UNIT mm	B1	Modify Data	HZF	03/25/2009
NONE	B4		B0	NEW RELEASE	HZF	02/24/2009
			NO. REV.	REVISIONS	CHK	DATE