



Recommended P.C.B. Layout

**SPECIFICATION**

Current Rating: 2A AC/DC
Voltage Rating: 250V AC/DC
Operation Temperature: -25°C~+85°C
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Terminal: Brass, Tin Plated
Material: PA66+G.F.(UL94V-0)
RoHS Compliant

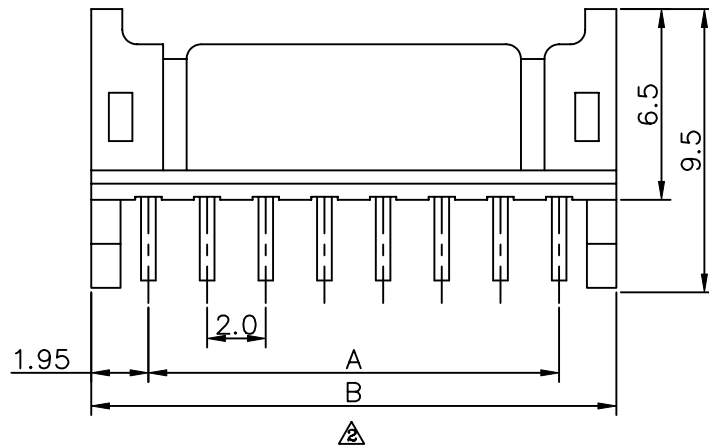

Pos.	A	B
4	2.0	6.0
6	4.0	8.0
8	6.0	10.0
10	8.0	12.0
12	10.0	14.0
14	12.0	16.0
16	14.0	18.0
18	16.0	20.0
20	18.0	22.0
22	20.0	24.0
24	22.0	26.0
26	24.0	28.0
28	26.0	30.0
30	28.0	32.0
32	30.0	34.0
34	32.0	36.0
40	38.0	42.0

AUK

A MEMBER OF AUK GROUP

太聯事業股份有限公司**AUK CONTRACTORS CO., LTD.**

CATEGORY

APPROVED BY

MEI

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

PART No.

CHECKED BY

HZF

DRAWING No.
PHDXXR-H

DRAWING BY

WZL


.X ±0.35
.XX ±0.25

SCALE

NONE

REV.

A2

UNIT
mm

A2

Modify Data

HZF

02/23/2010



A1

Modify Data

INGRID

03/28/2008



A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE