

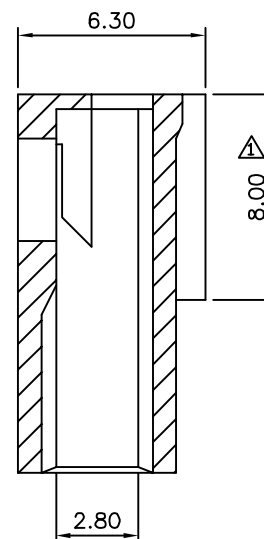


SPECIFICATION

Current Rating: 3A AC,DC
Voltage Rating: 250V AC Max.
Operating Temperature: -25°C~+85°C
Insulation Resistance: 1000 Megaohms Min.
Contact Resistance: 20 Milliohms Max.
Material: PA66(UL94V-2)
RoHS Compliant

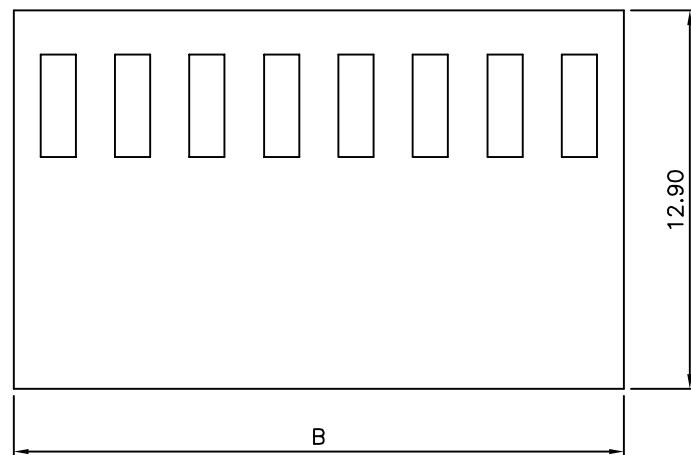

Pin	A	B
02	2.54	5.64
03	5.08	8.16
04	7.62	10.72
05	10.16	13.30
06	12.70	15.78
07	15.24	18.40
08	17.78	20.80
09	20.32	23.50
10	22.86	26.00
11	25.40	28.50
12	27.94	31.00
13	30.48	33.50
14	33.02	36.00
15	35.56	38.50
16	38.10	41.20
17	40.64	43.60
18	43.18	46.32
19	45.72	48.80
20	48.26	51.34

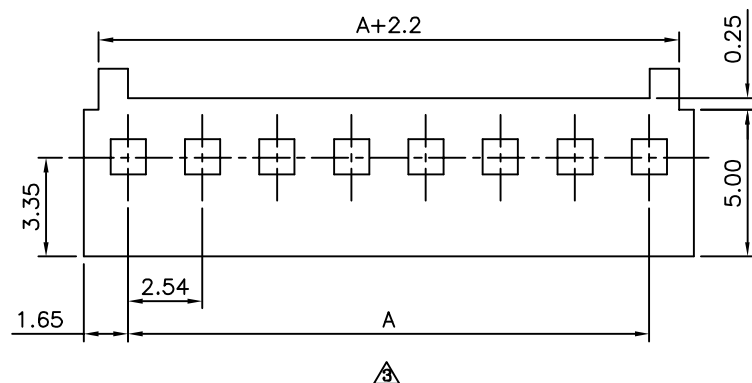

A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY	
PART No.	MKXXH-H	CHECKED BY HZF	
DRAWING No.	MKXXH-H	DRAWING BY SONG	
SCALE	NONE	REV.	B3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.35
.XX ±0.25
ANG.

NO.	REV.	REVISIONS	CHK	DATE
△ B3		Add Dim.	HZF	09/09/2011
△ B2		Modify SPEC.	HZF	12/26/2008
△ B1		ADD DIM 8.00	HZF	07/21/2008
△ B0		NEW RELEASE	BECKY	07/19/2005