


Grove - Servo



Grove - Servo is a bonus product for Grove lovers. We regulated the three-wire servo into a Grove standard connector. You can plug and play it as a typical Grove module now, without jumper wires clutter. For all Grove users (especially beginners), we provide you guidance PDF documents. Please download and read through [Preface - Getting Started](#) and [Introduction to Grove](#) before your using of the product.

Mini SERVO (ES08A) SERIES

SERVO ES08A SPECIFICATIONS

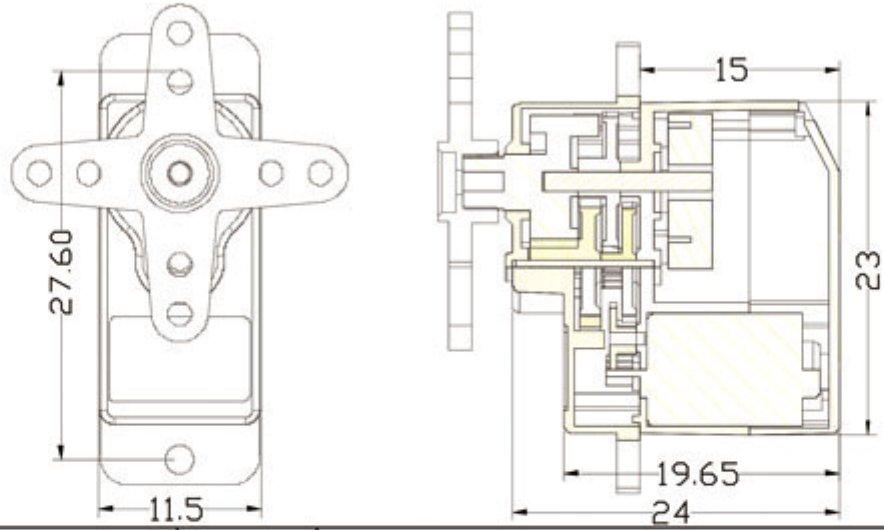

Operating Voltage:		4.8~6.0V
STD Direction:		Counter Clockwise / Pulse Traveling 1500 to 1900usec
Stall Torque:	4.8V	1.5 Kgf.cm(21.0 oz.in)
Operating Speed:	4.8V	0.12 Sec/60° at no load
Stall Torque:	6.0V	1.8 Kgf.cm(25.2 oz.in)
Operating Speed:	6.0V	0.10 Sec/60° at no load
Size:		23X11.5X24 mm
Weight:		8.5 g(0.31 oz)
Plug Available		FUT ;JR
Other		Analog,Plastics

Kit include: Servos Horns x3 & Screw x3

Documents

- [Arduino Tutorial - Servo Library](#)
- [Understanding RC Servos](#)