





REVISION RECORD

REV	ECO	DESCRIPTION	DFT	DATE
A		增加VDE,CE刻字	Zengy	13/30/09

Notes:

1. Pitch:5.08mm , Poles:2-XXP
2. Rated voltage/current:UL1059 300/20A
VDE 250V/20A
- 3.Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:26~12AWG, 0.5~2.5mm²
7. Max.Torque Value:M3, 5.1kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
over	to	over	to	over	to	over	to
6	10	30	60	100	150		
to	to	to	to	to	to		
10	24	30	60	100	150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

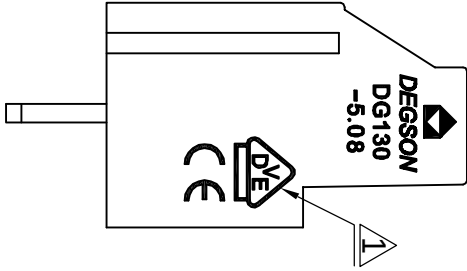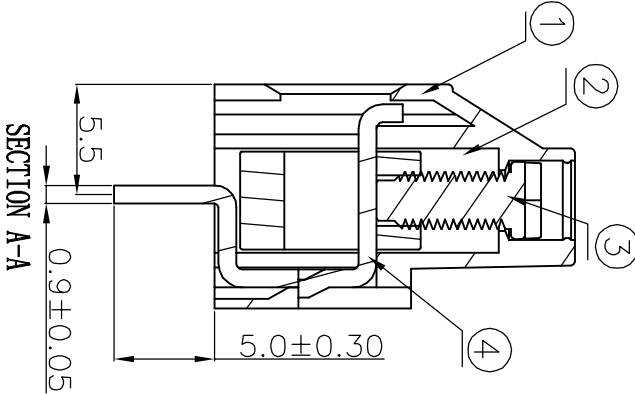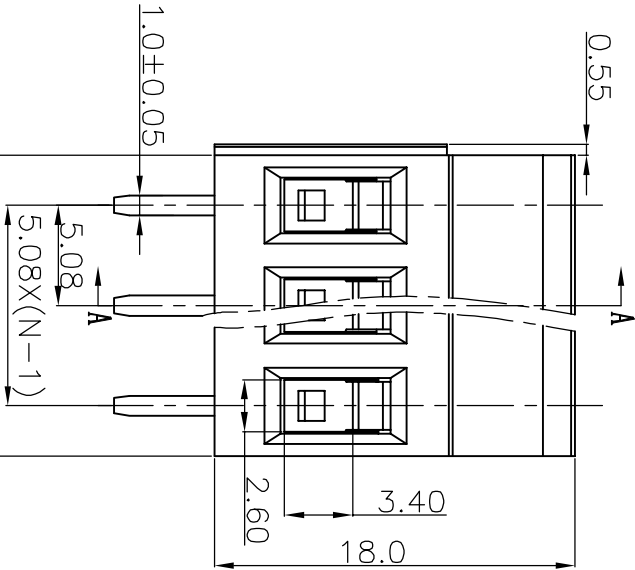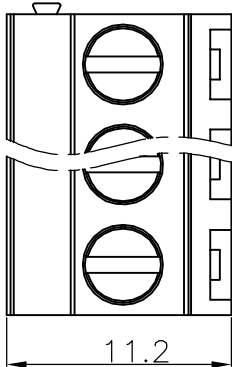

4	DG130-Pin header	4087B00010(H)	XX	Barss	SnCe plated
3	DG129-Screws-M3	S000001430(H)	XX	Steel	C ³ Zn
2	DG129-Cage	X000000200(H)	XX	Brass	Ni plated
1	DG130-5.08-Housing	4114A0YXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DEGSON 宁波德正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME
DG130-5.08-XXP-1Y-00A (H)

DRAWING NO. DG130-5.08-E01

SIZE
A3

DO NOT SCALE DRAWING

SHEET

OF