
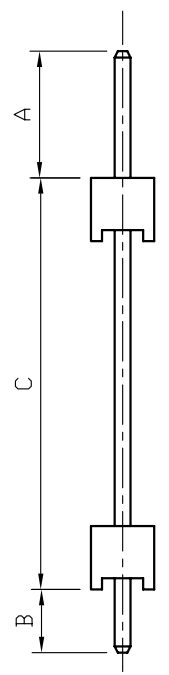
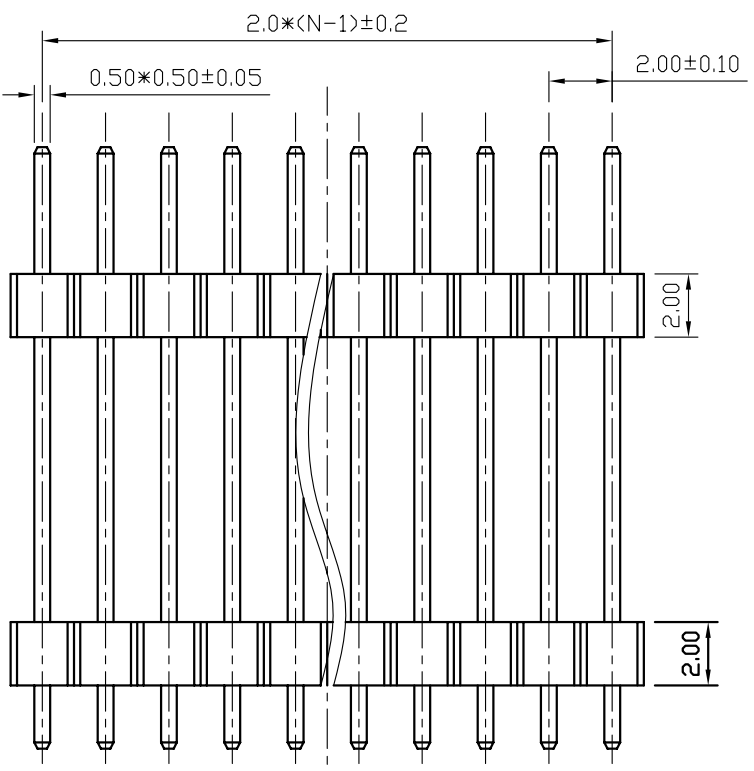



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'		

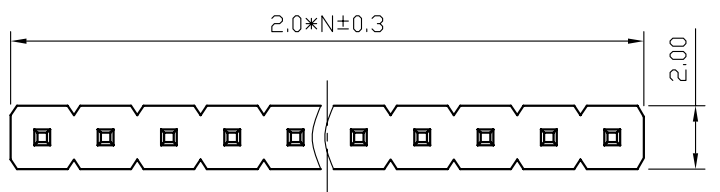

- NOTES:
- MATERIAL
 - INSULATOR:PBT(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
 - SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MQ Min.
 - DIELECTRIC WITHSTANDING:300VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.
 - PART NUMBER: DS1030-01
 - PRODUCT NUMBER CODE:

DS1030-01 - X X X X X X X
 DIM.A B C TYPE
 1: TYPE 1
 MOUNTING TYPE
 V: VERTICAL TYPE
 HOUSING COLOR
 B:BLACK
 CONNECTOR PLATING
 8: FULL GOLD FLASH
 CONECT TYPE
 P:PLUG
 No.OF CONTACTS
 1*1-1*40
 SERIES No.
 DS1030-01

N:NUMBER OF CONTACTS



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

TYPE	DIM A	DIM B	DIM C
1	3.50	3.00	6.00

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	⊕	TITLE	2.0mm PITCH PIN HEADER SINGLE ROW STRAIGHT	
X.	±0.60	X.	±5'	UNITS	mm			
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1030-01 SERIES	
.XX	±0.25	.XX	±2'	PLH2-40	1030-01			
2	CONTACT	COPPER ALLOY	GOLD PLATED	DRAWING TYPE	CUSTOMER			
1	HOUSING	THERMOPLASTIC	UL 94 V-0	SCALE	1:1	SHEET	1 OF 1	
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING NO.	C-DS1030-01-XXXXXX		