



■ Features :

- High efficiency 94% and low power dissipation
- 150% peak load capability
- Built-in active PFC function, PF>0.93
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- UL 508 (industrial control equipment) approved
- EN61000-6-2(EN50082-2) industrial immunity level
- Built-in DC OK relay contact
- 100% full load burn-in test
- 3 years warranty




**SPECIFICATION**

| MODEL                                |  | SDR-240-24   | SDR-240-48                       |
|--------------------------------------|--|--|----------------------------------|
| OUTPUT                               | DC VOLTAGE   | 24V  | 48V                              |
|                                      | RATED CURRENT  | 10A  | 5A                               |
|                                      | CURRENT RANGE  | 0 ~ 10A  | 0 ~ 5A                           |
|                                      | RATED POWER  | 240W   | 240W                             |
|                                      | PEAK CURRENT   | 15A  | 7.5A                             |
|                                      | PEAK POWER <small>Note.6</small>   | 360W (3sec.)   |                                  |
|                                      | RIPPLE & NOISE (max.) <small>Note.2</small>  | 50mVp-p  | 50mVp-p                          |
|                                      | VOLTAGE ADJ. RANGE   | 24 ~ 28V   | 48 ~ 55V                         |
|                                      | VOLTAGE TOLERANCE <small>Note.3</small>  | ± 1.0%   | ± 1.0%                           |
|                                      | LINE REGULATION  | ± 0.5%   | ± 0.5%                           |
|                                      | LOAD REGULATION  | ± 1.0%   | ± 1.0%                           |
|                                      | SETUP, RISE TIME   | 650ms, 60ms/230VAC   | 1300ms, 60ms/115VAC at full load |
| HOLD UP TIME (Typ.)                  | 20ms/230VAC  | 20ms/115VAC at full load   |                                  |
| INPUT                                | VOLTAGE RANGE  | 88 ~ 264VAC  | 124 ~ 370VDC                     |
|                                      | FREQUENCY RANGE  | 47 ~ 63Hz  |                                  |
|                                      | POWER FACTOR (Typ.)  | 0.94/230VAC  | 0.99/115VAC at full load         |
|                                      | EFFICIENCY (Typ.) <small>Note.8</small>  | 94%  |                                  |
|                                      | AC CURRENT (Typ.)  | 2.6A/115VAC  | 1.3A/230VAC                      |
|                                      | INRUSH CURRENT (Typ.)  | 33A/115VAC   | 55A/230VAC                       |
| LEAKAGE CURRENT                      | <1mA/ 240VAC   |  |                                  |
| PROTECTION                           | OVERLOAD   | Normally works within 110 ~ 150% rated output power for more than 3 seconds and then shut down o/p voltage with auto-recovery<br>>150% rated power, constant current limiting with auto-recovery within 2 seconds and may cause to shut down if over 2 seconds |                                  |
|                                      | OVER VOLTAGE   | 29 ~ 33V   | 56 ~ 65V                         |
|                                      | OVER TEMPERATURE   | 95°C ± 5°C (TSW : detect on heatsink of power switch)<br>Protection type : Shut down o/p voltage, recovers automatically after temperature goes down   |                                  |
| FUNCTION                             | DC OK REALY CONTACT RATINGS (max.)   | 60Vdc/0.3A, 30Vdc/1A, 30Vac/0.5A resistive load  |                                  |
| ENVIRONMENT                          | WORKING TEMP. <small>Note.5</small>  | -25 ~ +70°C (Refer to "Derating Curve")  |                                  |
|                                      | WORKING HUMIDITY   | 20 ~ 95% RH non-condensing   |                                  |
|                                      | STORAGE TEMP., HUMIDITY  | -40 ~ +85°C, 10 ~ 95% RH   |                                  |
|                                      | TEMP. COEFFICIENT  | ± 0.03%/°C (0 ~ 50°C )   |                                  |
|                                      | VIBRATION  | Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6   |                                  |
| SAFETY & EMC <small>(Note 4)</small> | SAFETY STANDARDS   | UL508, TUV EN60950-1, EAC TP TC 004 approved;(meet EN60204-1)  |                                  |
|                                      | WITHSTAND VOLTAGE  | I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC O/P-DC OK:0.5KVAC  |                                  |
|                                      | ISOLATION RESISTANCE   | I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25°C / 70% RH  |                                  |
|                                      | EMC EMISSION   | Compliance to EN55011, EN55032 (CISPR32), EN61204-3 Class B, EN61000-3-2,-3, EAC TP TC 020   |                                  |
| OTHERS                               | EMC IMMUNITY   | Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN61000-6-2 (EN50082-2), EN61204-3, heavy industry level, criteria A, EAC TP TC 020, SEMI F47, GL approved  |                                  |
|                                      | MTBF   | 169.3K hrs min.  | MIL-HDBK-217F (25°C)             |
|                                      | DIMENSION  | 63*125.2*113.5mm (W*H*D)   |                                  |
|                                      | PACKING  | 1.03Kg; 12pcs/13.4Kg/1.06CUFT  |                                  |
| NOTE                                 | <ol style="list-style-type: none"> <li>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>3. Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.</li> <li>5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended.</li> <li>6. 3 seconds max., please refer to peak loading curves.</li> <li>7. Derating may be needed under low input voltage. Please check the derating curve for more details.</li> <li>8. After 30 minutes of burn-in.</li> <li>9. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</li> </ol> |  |                                  |

**Mechanical Specification**

Case No. 979A Unit:mm

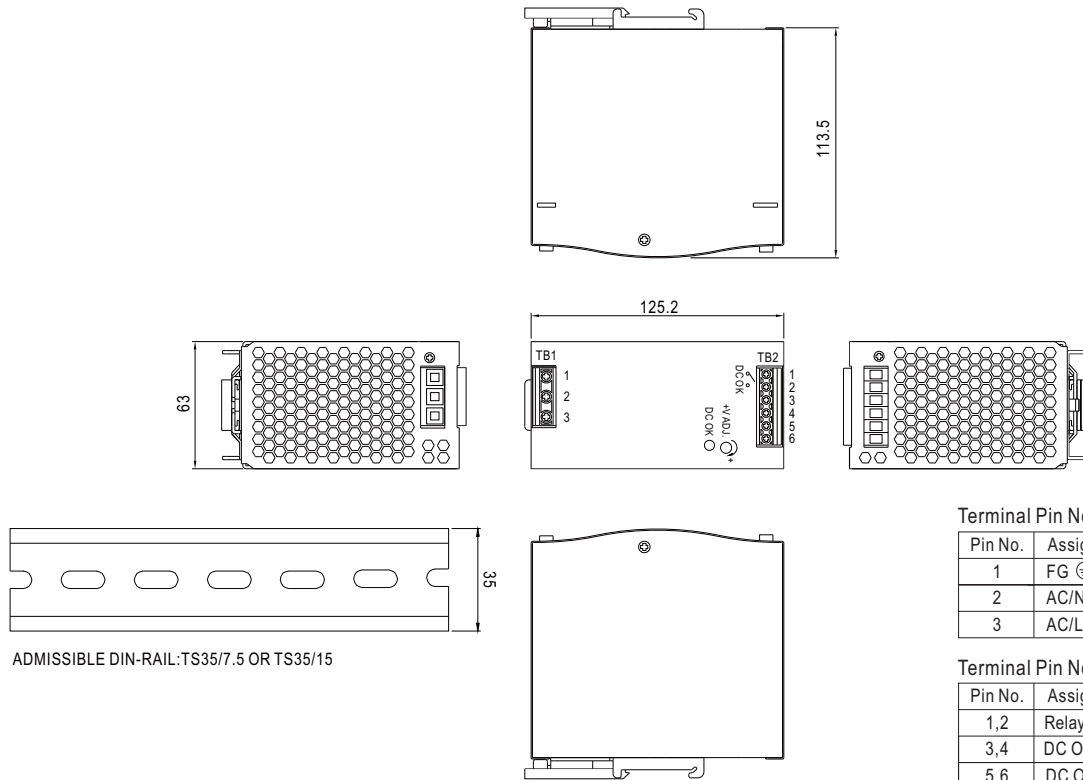


Terminal Pin No. Assignment (TB1)

| Pin No. | Assignment |
|---------|------------|
| 1       | FG ⊕       |
| 2       | AC/N       |
| 3       | AC/L       |

Terminal Pin No. Assignment (TB2)

| Pin No. | Assignment    |
|---------|---------------|
| 1,2     | Relay Contact |
| 3,4     | DC OUTPUT +V  |
| 5,6     | DC OUTPUT -V  |



**Block Diagram**

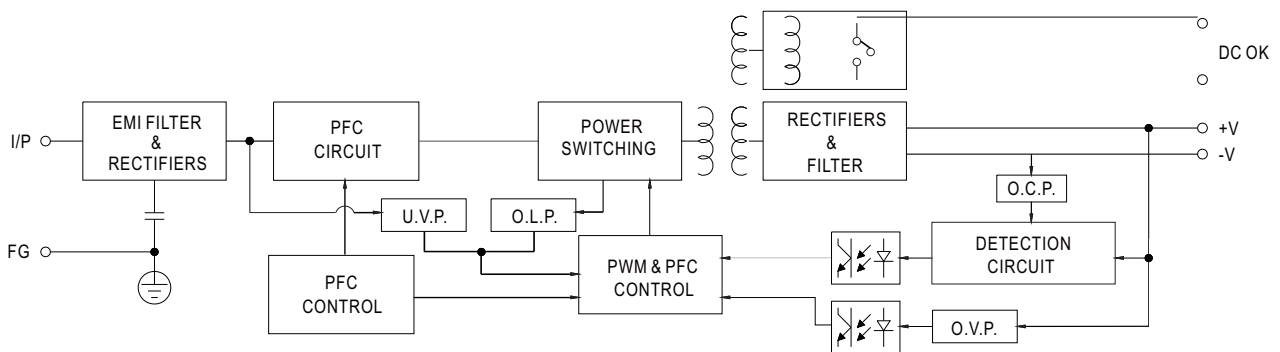


**DC OK Relay Contact**

|                        |                          |
|------------------------|--------------------------|
| Contact Close          | PSU turns on / DC OK.    |
| Contact Open           | PSU turns off / DC Fail. |
| Contact Ratings (max.) | 30V/1A resistive load.   |

■ Peak Loading

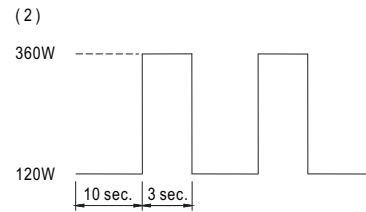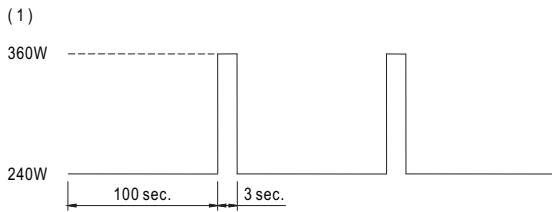

■ Derating Curve

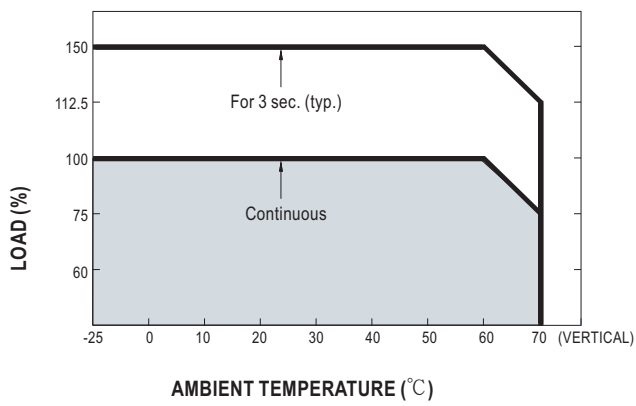

■ Output derating VS input voltage

