

# 2-Serial Module 6.0V 1.5F




## FEATURES

- Electric double layer capacitor
- 2 cells serially connected supercapacitor
- Semi-permanent, quick charge and discharge than batteries
- Suitable for smart meter or car driving recorder application
- UL and ISO/TS certificated, RoHS compliant
- Radial design with lead terminal type customized in 3 ways



## DIMENSIONS

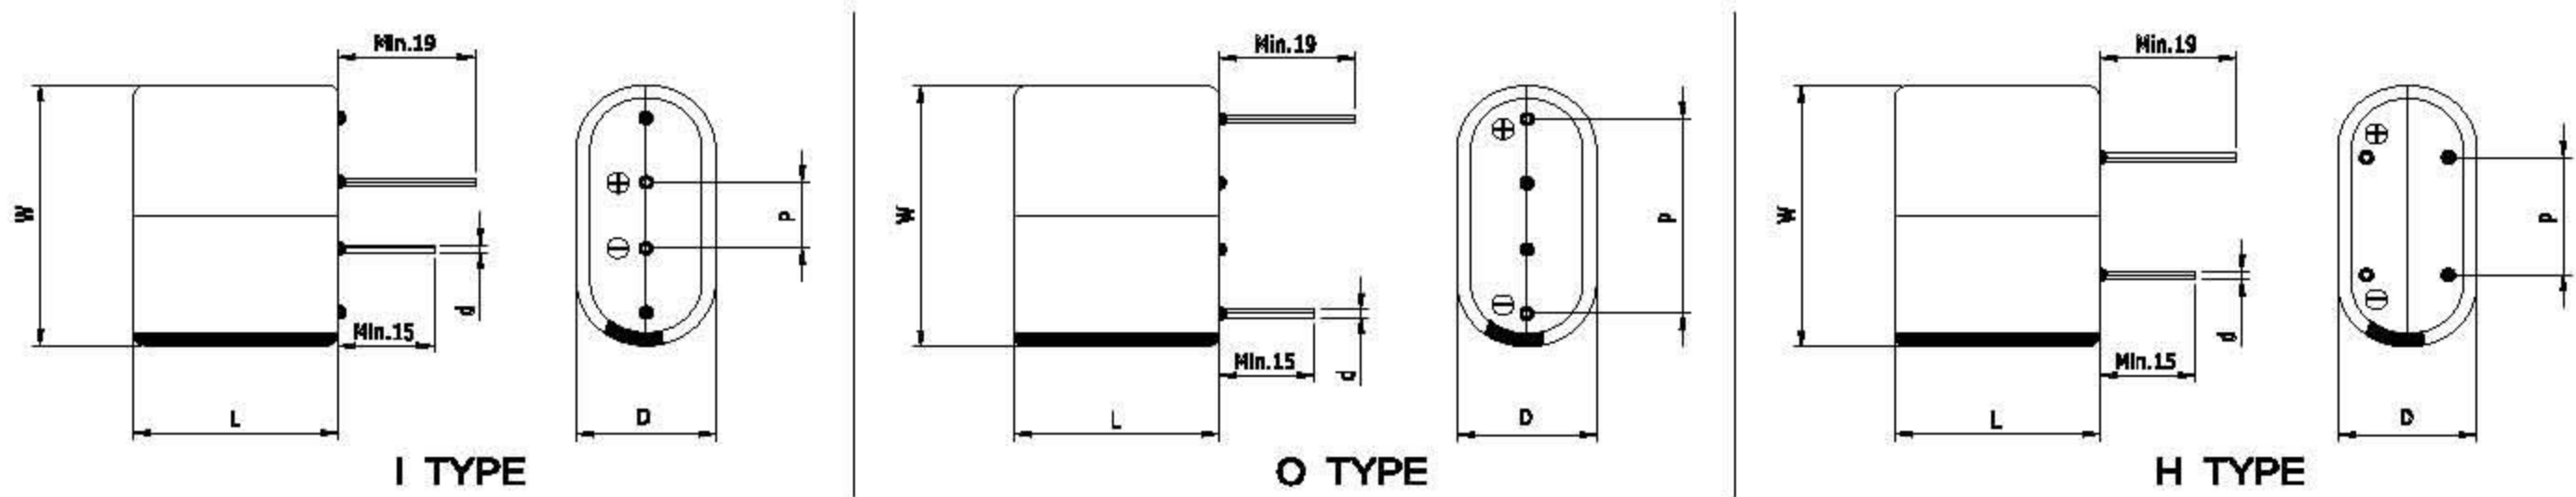

Dimensions in mm						
D +0.1 Max	W ± 1.0	L ± 1.5	d ± 0.1	P ± 0.2		
Φ8.5	17.0	22.0	Φ0.6	I: 4.7	O: 12.3	H: 8.5

This drawing is not to be scaled.

## SPECIFICATIONS

Part Number	Rated Voltage, $V_R$ (V)	Rated Capacitance (F)	AC ESR 1kHz (mΩ)	DC IR (mΩ)	Maximum Current (A)	Leakage Current (mA)	Stored Energy (J)	Dimension D x W x L (mm)	Weight (g)
VEC 6R0 155 QG-X	6.0	1.5	145.00	215.00	3.5	0.010	27.0	8.5 x 17.0 x 22.0	3.3

- \* X is variant type code such as I, O or H.
- \* Maximum Current: 1 second discharge to  $\frac{1}{2} \cdot V_R$
- \* Leakage Current: After 72hours at  $V_R$  and 25°C

Item	Characteristics	Remarks
Rated Voltage( $V_R$ )	6.0V	
Capacitance Tolerance	-10 ~ +30%	
Operating Temperature ( $T_{min} \sim T_{max}$ )	-40 ~ +65°C	$ \Delta cap  \leq 30\%$ of initial value at 25°C $ \Delta ESR  \leq 100\%$ of specified value at 25°C After 1,000 hours application of $V_R$ at $T_{max}$
Storage Temperature	-40 ~ 70°C	
Cycle Life	500,000 cycles	$ \Delta cap  \leq 30\%$ of initial value at 25°C $ \Delta ESR  \leq 100\%$ of specified value at 25°C Cycles from $V_R$ to $\frac{1}{2} \cdot V_R$ under constant current at 25°C
Shelf Life	2 years	$ \Delta cap  \leq 10\%$ of initial value at 25°C $ \Delta ESR  \leq 50\%$ of specified value at 25°C Without electrical charge under $T_{max}$